










TYPICAL PERFORMANCE CURVES FOR $\mu A111$




* Pins 5, 6 and 8 are shorted.




TYPICAL PERFORMANCE CURVES FOR $\mu A311$


**INPUT BIAS CURRENT
AS A FUNCTION
OF TEMPERATURE**



**INPUT OFFSET CURRENT
AS A FUNCTION
OF TEMPERATURE**




**OFFSET VOLTAGE
AS A FUNCTION
OF INPUT RESISTANCE**




*Pins 5, 6 and 8 are shorted.


**INPUT BIAS CURRENT
AS A FUNCTION OF
DIFFERENTIAL INPUT VOLTAGE**




**COMMON MODE LIMITS
AS A FUNCTION
OF TEMPERATURE**




**OUTPUT VOLTAGE
AS A FUNCTION OF
DIFFERENTIAL INPUT VOLTAGE**




**SATURATION VOLTAGE
AS A FUNCTION
OF CURRENT**




**SUPPLY CURRENT
AS A FUNCTION
OF TEMPERATURE**



**LEAKAGE CURRENT
AS A FUNCTION
OF TEMPERATURE**




OFFSET NULL CIRCUIT



OFFSET BALANCING


TYPICAL APPLICATIONS

STROBE CIRCUIT




STROBING

**INCREASING INPUT
STAGE CURRENT***




*Increases typical common mode slew rate from 7.0 V/μs to 18 V/μs.

TYPICAL APPLICATIONS (Cont'd)


ADJUSTABLE LOW VOLTAGE
REFERENCE SUPPLY

*Solid tantalum


POSITIVE PEAK DETECTOR





*Solid tantalum

ZERO CROSSING DETECTOR
DRIVING MOS LOGIC


NEGATIVE PEAK DETECTOR



*Solid tantalum


DIGITAL
TRANSMISSION ISOLATORSTROBING OF BOTH INPUT
AND OUTPUT STAGES*Typical input current is 50 pA
with inputs strobed off.

PRECISION PHOTODIODE COMPARATOR




*R2 sets the comparison level.
At comparison, the photodiode has
less than 5 mV across it, decreasing
leakages by an order of magnitude.

RELAY DRIVER WITH STROBE




*Absorbs inductive kickback of relay
and protects IC from severe voltage
transients on V++ line.

SWITCHING POWER AMPLIFIER



SWITCHING POWER AMPLIFIER

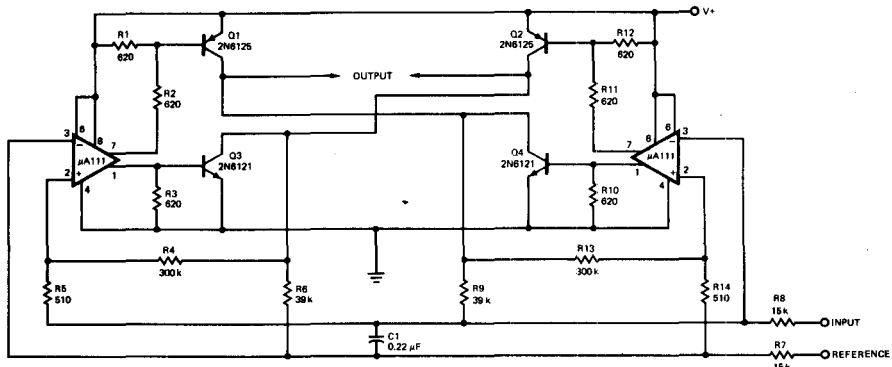

μA111 • μA311
VOLTAGE COMPARATORS
FAIRCHILD LINEAR INTEGRATED CIRCUITS


GENERAL DESCRIPTION — The 111 and 311 are monolithic, low input current Voltage Comparators, each constructed using the Fairchild Planar[®] epitaxial process. The 111 series operates from the single 5 V integrated circuit logic supply to the standard ± 15 V operational amplifier supplies. The 111 series is intended for a wide range of applications including driving lamps or relays and switching voltages up to 50 V at currents as high as 50 mA. The output stage is compatible with RTL, DTL, TTL and MOS logic. The input stage current can be raised to increase input slew rate.

- LOW INPUT BIAS CURRENT – 150 nA MAX (111), 250 nA MAX (311)
- LOW INPUT OFFSET CURRENT – 20 nA MAX (111), 50 nA MAX (311)
- DIFFERENTIAL INPUT VOLTAGE – ± 30 V
- POWER SUPPLY VOLTAGE SINGLE 5.0 V SUPPLY TO ± 15 V
- OFFSET VOLTAGE NULL CAPABILITY
- STROBE CAPABILITY

ABSOLUTE MAXIMUM RATINGS

Voltage Between V+ and V- Terminals	36 V
Output to V- (μ A111)	50 V
(μ A311)	40 V
Ground to V-	30 V
Differential Input Voltage	± 30 V
Input Voltage (Note 1)	± 15 V
Internal Power Dissipation (Note 2)	500 mW
Output Short Circuit Duration	10 s
Storage Temperature Range (Metal Can and Hermetic Mini DIP)	-65°C to $+150^{\circ}\text{C}$
(Molded Mini DIP)	-55°C to $+125^{\circ}\text{C}$
Operating Temperature Range	
Military (μ A111)	-55°C to $+125^{\circ}\text{C}$
Commercial (μ A311)	0°C to $+70^{\circ}\text{C}$

EQUIVALENT CIRCUIT

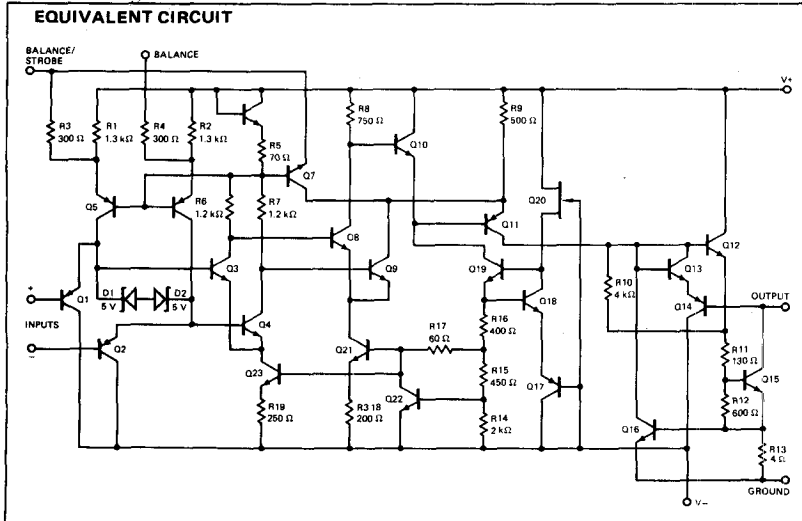


CONNECTION DIAGRAMS

8-LEAD METAL CAN

(TOP VIEW)

PACKAGE OUTLINE 5S

PACKAGE CODE H




ORDER INFORMATION

TYPE	PART NO.
μ A111	μ A111H
μ A311	μ A311H

8-LEAD MINI DIP

(TOP VIEW)

PACKAGE OUTLINE 9T

PACKAGE CODE

ORDER INFORMATION

TYPE	PART NO.
μA111	μA111R
μA311	μA311R
μA311	μA311T

$\mu A111$ **ELECTRICAL CHARACTERISTICS** ($V_S = \pm 15\text{ V}$, $T_A = -55^\circ\text{C}$ to $+125^\circ\text{C}$ unless otherwise specified) Note 3

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage (Note 4)	$T_A = 25^\circ\text{C}$, $R_S \leq 50\text{ k}\Omega$		0.7	3.0	mV
Input Offset Current (Note 4)	$T_A = 25^\circ\text{C}$		4.0	10	nA
Input Bias Current	$T_A = 25^\circ\text{C}$		60	100	nA
Voltage Gain	$T_A = 25^\circ\text{C}$		200		V/mV
Response Time (Note 5)	$T_A = 25^\circ\text{C}$		200		ns
Saturation Voltage	$V_{IN} \leq -5\text{ mV}$, $I_{OUT} = 50\text{ mA}$ $T_A = 25^\circ\text{C}$		0.75	1.5	V
Strobe On Current	$T_A = 25^\circ\text{C}$		3.0		mA
Output Leakage Current	$V_{IN} \geq 5\text{ mV}$, $V_{OUT} = 35\text{ V}$ $T_A = 25^\circ\text{C}$		0.2	10	nA
Input Offset Voltage (Note 4)	$R_S \leq 50\text{ k}\Omega$			4.0	mV
Input Offset Current (Note 4)				20	nA
Input Bias Current				150	nA
Input Voltage Range			± 14		V
Saturation Voltage	$V^+ \geq 4.5\text{ V}$, $V^- = 0$ $V_{IN} \leq -6\text{ mV}$, $I_{SINK} \leq 8\text{ mA}$		0.23	0.4	V
Output Leakage Current	$V_{IN} \geq 5\text{ mV}$, $V_{OUT} = 35\text{ V}$		0.1	0.5	μA
Positive Supply Current	$T_A = 25^\circ\text{C}$		5.1	6.0	mA
Negative Supply Current	$T_A = 25^\circ\text{C}$		4.1	5.0	mA

 $\mu A311$ **ELECTRICAL CHARACTERISTICS** ($V_S = \pm 15\text{ V}$, $T_A = 0^\circ\text{C}$ to 70°C unless otherwise specified) Note 3

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage (Note 4)	$T_A = 25^\circ\text{C}$, $R_S \leq 50\text{ k}\Omega$		2.0	7.5	mV
Input Offset Current (Note 4)	$T_A = 25^\circ\text{C}$		6.0	50	nA
Input Bias Current	$T_A = 25^\circ\text{C}$		100	250	nA
Voltage Gain	$T_A = 25^\circ\text{C}$		200		V/mV
Response Time (Note 5)	$T_A = 25^\circ\text{C}$		200		ns
Saturation Voltage	$V_{IN} \leq -10\text{ mV}$, $I_{OUT} = 50\text{ mA}$ $T_A = 25^\circ\text{C}$		0.75	1.5	V
Strobe On Current	$T_A = 25^\circ\text{C}$		3.0		mA
Output Leakage Current	$V_{IN} \geq 10\text{ mV}$, $V_{OUT} = 35\text{ V}$ $T_A = 25^\circ\text{C}$		0.2	50	nA
Input Offset Voltage (Note 4)	$R_S \leq 50\text{ k}\Omega$			10	mV
Input Offset Current (Note 4)				70	nA
Input Bias Current				300	nA
Input Voltage Range			± 14		V
Saturation Voltage	$V^+ \geq 4.5\text{ V}$, $V^- = 0$ $V_{IN} \leq -10\text{ mV}$, $I_{SINK} \leq 8\text{ mA}$		0.23	0.4	V
Positive Supply Current	$T_A = 25^\circ\text{C}$		5.1	7.5	mA
Negative Supply Current	$T_A = 25^\circ\text{C}$		4.1	5.0	mA

NOTES:

1. This rating applies for $\pm 15\text{ V}$ supplies. The positive input voltage limit is 30 V above the negative supply. The negative input voltage limit is equal to the negative supply voltage or 30 V below the positive supply, whichever is less.
2. Rating applies to ambient temperatures up to 70°C . Above 70°C ambient derate linearly at $6.3\text{ mW}/^\circ\text{C}$ for metal can; $8.3\text{ mW}/^\circ\text{C}$ for mini DIP.
3. The offset voltage, offset current and bias current specifications apply for any supply voltage from a single 5 V supply up to $\pm 15\text{ V}$ supplies.
4. The offset voltages and offset currents given are the maximum values required to drive the output within a volt of either supply with a 1 mA load. Thus, these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.
5. The response time specified (see definitions) is for a 100 mV input step with 5 mV overdrive.