


## Series 850

PCB connectors 1.27 mm

Single row / double row

Surface mount

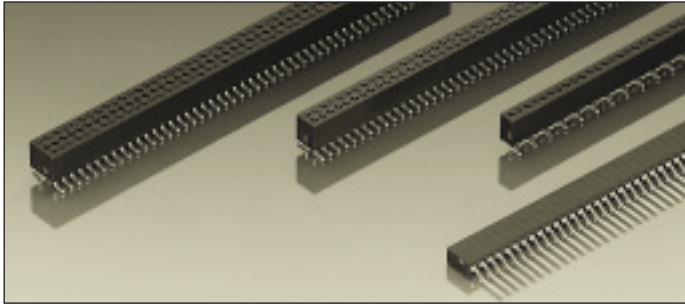




### Ultraminiature PCB receptacles, surface mount



Grid spacing 1.27×1.27 mm


Receptacles for pins Ø 0.35–0.45 mm

For corresponding connectors see pages 13, 14 and 15

Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	

### Ordering information

Replace **xxx** with the number of poles, e.g. 853-91-**xxx**-30-001 for a double row version with 8 pins per row becomes:  
853-91-**016**-30-001

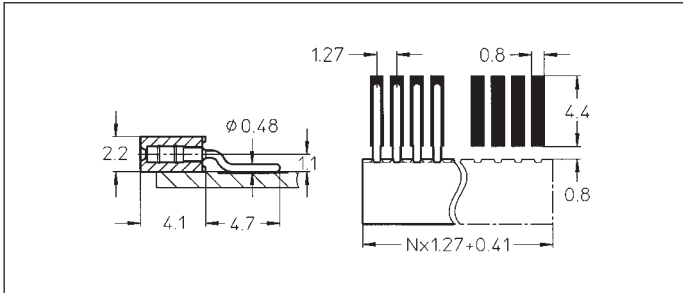


851-91-xxx-40-001

851-93-xxx-40-001

851-99-xxx-40-001

SMD receptacle: single row, parallel mount

Availability from: 1 to 50 contacts  
Standard number of contacts 25 and 50

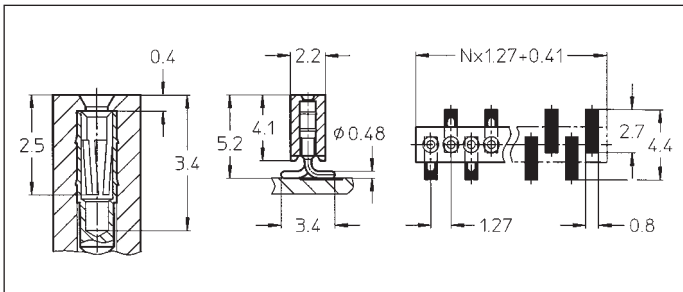


851-91-xxx-30-001

851-93-xxx-30-001

851-99-xxx-30-001

SMD receptacle: single row, perpendicular mount

Availability from: 3 to 50 contacts  
Standard number of contacts single row: 25 and 50

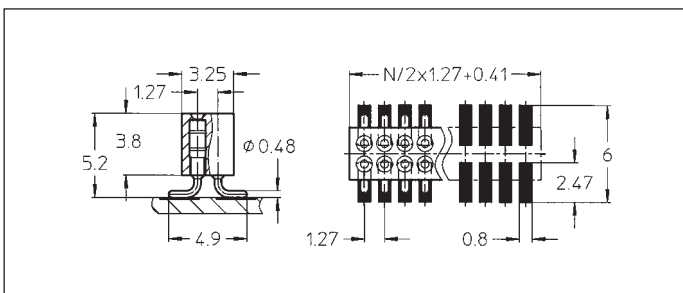


853-91-xxx-30-001

853-93-xxx-30-001

853-99-xxx-30-001

SMD receptacle: double row, perpendicular mount

Availability from: 4 to 100 contacts  
Standard number of contacts 50 and 100

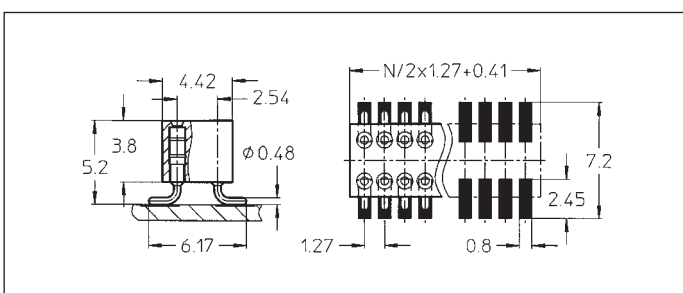

853-91-xxx-30-002

853-93-xxx-30-002

853-99-xxx-30-002

SMD receptacle: double row with 2.54 mm distance, perpendicular row to row mount

Availability from: 4 to 100 contacts  
Standard number of contacts 100  
On request with positioning pins