



中国·人民电器集团
PEOPLE ELE. APPLIANCE GROUP CHINA

POWER RELAY


POWER RELAY

JZC-22F



JZC-22F

Size(mm): 19.3×16.8×21
Terminal layout: 1Z、1H
Contact capacity: 5A 7A 12A 15A
125VAC 287VDC
Contact resistance: ≤50mΩ
Insulation resistance: ≥100MΩ
Dielectric strength: BOC 500VAC
BCC 1500VAC

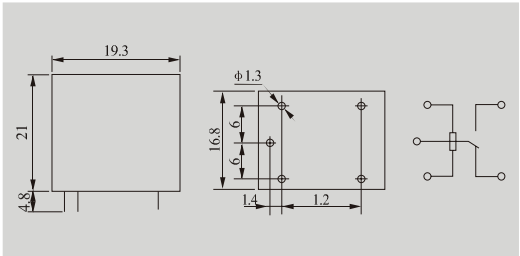


JZC-23F(4123)



JZC-23F(4123)

Size(mm): 20.8×16.1×16.8
Terminal layout: 1Z、1H
Contact capacity: 10A 125VAC
Contact resistance: ≤50mΩ
Insulation resistance: ≥100MΩ
Dielectric strength: BOC 500VAC
BCC 1500VAC

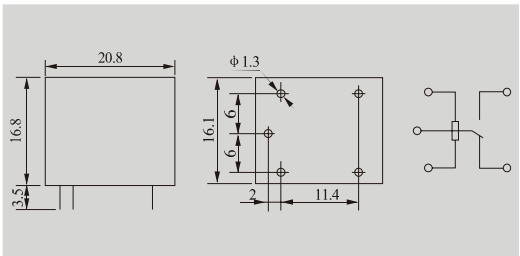


JQC-8F(T76)



JQC-8F(T76)

Size(mm): 22.5×16.8×11.1
Terminal layout: 1Z、1H
Contact capacity: 20A 125VAC
10A 220VDC
Contact resistance: ≤50mΩ
Insulation resistance: ≥500MΩ
Dielectric strength: BOC 1000VAC
BCC 1500VAC

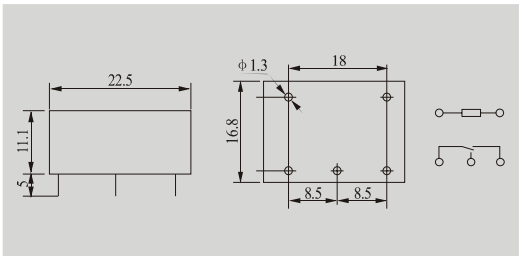


JQX-15F(T90)



JQX-15F(T90)

Size(mm): 32.5×27.5×20.5
Terminal layout: 1Z、1H
Contact capacity: 30A 125VAC
30A 28VDC
20A 220VAC
Contact resistance: ≤50mΩ
Insulation resistance: ≥500MΩ
Dielectric strength: BOC 1000VAC
BCC 1500VAC

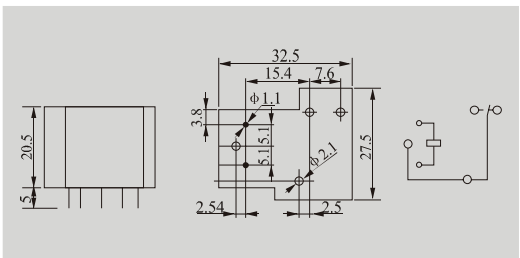

Model	Coil nominal voltage	Coil nominal power	Electrical life	Mechanical life	Operating temperature	Weight	Mounting methods
JZC-22F	DC 3 to 48V	DC ≤ 0.45W	10 ⁵ OPS	10 ⁶ OPS	-25℃~40℃	≤13g	Printed-circuit board
JZC-23F(4123)	DC 3 to 48V	DC ≤ 0.36W	10 ⁵ OPS	10 ⁶ OPS	-40℃~55℃	≤10g	Printed-circuit board
JQC-8F(T76)	DC 3 to 48V	DC ≤ 0.2W	10 ⁵ OPS	10 ⁷ OPS	-40℃~45℃	≤11g	Printed-circuit board
JQX-15F(T90)	DC 3 to 110V	DC ≤ 0.93W	10 ⁵ OPS	10 ⁷ OPS	-40℃~85℃	≤24g	Printed-circuit board