

1. PART NO. EXPRESSION :

- V 7 X 1 0 3 J - B - 1 0

(a) (b) (c) (d) (e) (f)
- (a) Chip Size


(b) Temp. Coefficient : X (±15%)
(Temp. range : -55°C to +125°C)

(c) Capacitance code : 103 = 10000pF
- (d) Tolerance code

(e) Voltage code : B = 200Vdc

(f) 10 : Lead Free


2. CONFIGURATION & DIMENSIONS :

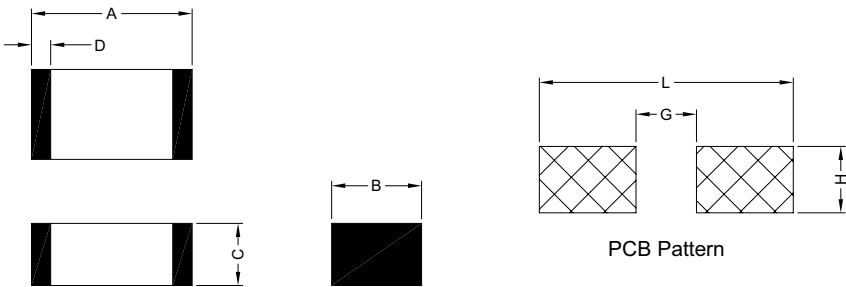


Unit:m/m

A	B	C	D	G	H	L
4.60±0.30	3.20±0.30	3.00 Max.	0.30 Min.	2.80 - 3.40	2.30 - 3.00	1.80 - 2.00

3. SCHEMATIC :



4. MATERIALS :

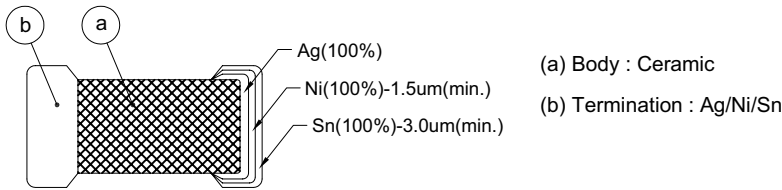

5. GENERAL SPECIFICATION :

- a) Storage temp. : +5°C to +40°C

b) Operating temp. : -55°C to +125°C

c) Resistance to solder heat : 260°C.10secs



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

6. ELECTRICAL CHARACTERISTICS : (Rated Voltage : 200Vdc)

Part Number	Capacitance (pF)
V7X103 -B-10	10000
V7X123 -B-10	12000
V7X153 -B-10	15000
V7X183 -B-10	18000
V7X223 -B-10	22000
V7X273 -B-10	27000
V7X333 -B-10	33000
V7X393 -B-10	39000
V7X473 -B-10	47000
V7X563 -B-10	56000
V7X683 -B-10	68000
V7X104 -B-10	100000
V7X124 -B-10	120000
V7X154 -B-10	150000
V7X184 -B-10	180000
V7X224 -B-10	220000
V7X274 -B-10	270000
V7X334 -B-10	330000
V7X394 -B-10	390000
V7X474 -B-10	470000

Part Number	Capacitance (pF)
V7X564 -B-10	560000
V7X684 -B-10	680000
V7X105 -B-10	1000000
V7X155 -B-10	1500000
V7X225 -B-10	2200000

Tolerance code :

: C : $\pm 0.25\text{pF}$
 D : $\pm 0.50\text{pF}$
 J : $\pm 5\%$
 K : $\pm 10\%$
 M : $\pm 20\%$



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 2

6. ELECTRICAL CHARACTERISTICS : (Rated Voltage : 250Vdc)

Part Number	Capacitance (pF)
V7X103 -C-10	10000
V7X123 -C-10	12000
V7X153 -C-10	15000
V7X183 -C-10	18000
V7X223 -C-10	22000
V7X273 -C-10	27000
V7X333 -C-10	33000
V7X393 -C-10	39000
V7X473 -C-10	47000
V7X563 -C-10	56000
V7X683 -C-10	68000
V7X104 -C-10	100000
V7X124 -C-10	120000
V7X154 -C-10	150000
V7X184 -C-10	180000
V7X224 -C-10	220000
V7X274 -C-10	270000
V7X334 -C-10	330000
V7X394 -C-10	390000
V7X474 -C-10	470000

Part Number	Capacitance (pF)
V7X564 -C-10	560000
V7X684 -C-10	680000
V7X105 -C-10	1000000

Tolerance code :

: C : $\pm 0.25\text{pF}$
D : $\pm 0.50\text{pF}$
J : $\pm 5\%$
K : $\pm 10\%$
M : $\pm 20\%$



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 3

6. ELECTRICAL CHARACTERISTICS : (Rated Voltage : 500Vdc)

Part Number	Capacitance (pF)
V7X103 -E-10	10000
V7X123 -E-10	12000
V7X153 -E-10	15000
V7X183 -E-10	18000
V7X223 -E-10	22000
V7X273 -E-10	27000
V7X333 -E-10	33000
V7X393 -E-10	39000
V7X473 -E-10	47000
V7X563 -E-10	56000
V7X683 -E-10	68000
V7X104 -E-10	100000
V7X124 -E-10	120000
V7X154 -E-10	150000
V7X184 -E-10	180000
V7X224 -E-10	220000

Tolerance code :

: C : $\pm 0.25\text{pF}$

D : $\pm 0.50\text{pF}$

J : $\pm 5\%$

K : $\pm 10\%$

M : $\pm 20\%$



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 4

6. ELECTRICAL CHARACTERISTICS : (Rated Voltage : 1KVdc)

Part Number	Capacitance (pF)
V7X221 -J-10	220
V7X271 -J-10	270
V7X331 -J-10	330
V7X391 -J-10	390
V7X471 -J-10	470
V7X561 -J-10	560
V7X681 -J-10	680
V7X102 -J-10	1000
V7X122 -J-10	1200
V7X152 -J-10	1500
V7X182 -J-10	1800
V7X222 -J-10	2200
V7X272 -J-10	2700
V7X332 -J-10	3300
V7X392 -J-10	3900
V7X472 -J-10	4700
V7X562 -J-10	5600
V7X682 -J-10	6800
V7X103 -J-10	10000
V7X123 -J-10	12000

Part Number	Capacitance (pF)
V7X153 -J-10	15000
V7X183 -J-10	18000
V7X223 -J-10	22000
V7X273 -J-10	27000
V7X333 -J-10	33000
V7X393 -J-10	39000
V7X473 -J-10	47000
V7X563 -J-10	56000
V7X683 -J-10	68000
V7X104 -J-10	100000

Tolerance code :

: C : $\pm 0.25\text{pF}$
D : $\pm 0.50\text{pF}$
J : $\pm 5\%$
K : $\pm 10\%$
M : $\pm 20\%$



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 5

6. ELECTRICAL CHARACTERISTICS : (Rated Voltage : 2KVdc)

Part Number	Capacitance (pF)
V7X271 -L-10	270
V7X331 -L-10	330
V7X391 -L-10	390
V7X471 -L-10	470
V7X561 -L-10	560
V7X681 -L-10	680
V7X821 -L-10	820
V7X102 -L-10	1000
V7X122 -L-10	1200
V7X152 -L-10	1500
V7X182 -L-10	1800
V7X222 -L-10	2200
V7X272 -L-10	2700
V7X332 -L-10	3300
V7X392 -L-10	3900
V7X472 -L-10	4700

Tolerance code :

: C : $\pm 0.25\text{pF}$ D : $\pm 0.50\text{pF}$ J : $\pm 5\%$ K : $\pm 10\%$ M : $\pm 20\%$ **RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 6

6. ELECTRICAL CHARACTERISTICS : (Rated Voltage : 3KVdc)

Part Number	Capacitance (pF)
V7X681 -N-10	680
V7X821 -N-10	820
V7X102 -N-10	1000
V7X122 -N-10	1200
V7X152 -N-10	1500
V7X182 -N-10	1800
V7X222 -N-10	2200
V7X272 -N-10	2700

Tolerance code :

- : C : $\pm 0.25\text{pF}$
- D : $\pm 0.50\text{pF}$
- J : $\pm 5\%$
- K : $\pm 10\%$
- M : $\pm 20\%$



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.



15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 7

7. RELIABILITY & TEST CONDITION :

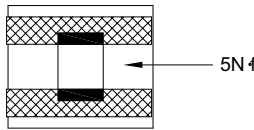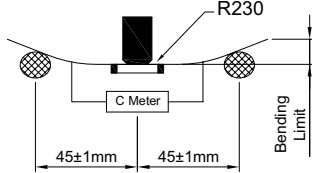ITEM	PERFORMANCE	TEST CONDITION																		
Electrical Characteristics Test																				
Visual	No abnormal exterior appearance	Visual inspection																		
Insulation Resistance	10,000MΩ or 500/CΩ product whichever is smaller	$V \leq 500V$, Rated Voltage $V > 500V$, Applied 500Vdc Charge Time: 60sec is applied less than 50mA current																		
Capacitance	Within the specified tolerance [Class I (N) & Class II]	Class I : $C \leq 100pF$: Freq. = 1MHz $\pm 10\%$, Voltage = 1.0 $\pm 0.2V_{rms}$ $C > 100pF$: Freq. = 1KHz $\pm 10\%$																		
Q	Class I (N) : More than 30pF : $Q \geq 1000$ 30pF & below : $Q \geq 400+20C$ (C: Capacitance, pF)	Class II : X : Freq. = 1KHz $\pm 10\%$, Voltage = 1.0 $\pm 0.2V_{rms}$ Z/E : Freq. = 1KHz $\pm 10\%$, Voltage = 1.0 $\pm 0.2V_{rms}$ Perform a heat temp. at 150 $\pm 5^\circ C$ for 30min. then place room temp. for 24 ± 2 hr																		
Tan δ	Class II (X) : 2.5% maximum Class II (Z/E) : 4.0% maximum																			
Withstanding Voltage	No dielectric breakdown or mechanical breakdown	200V $\leq V < 500V$: 200% rated voltage 500V $\leq V < 1000V$: 150% rated voltage 1000 $\leq V$: 120% rated voltage for 1-5sec. Current is limited to less than 50mA. <small>* Withstanding voltage testing requires immersion of the element in a isolation fluid prevent arcing on the chip surface, at voltage over 1000Vdc.</small>																		
Temperature Capacitance Coefficient	Class I : <table border="1"> <thead> <tr> <th>Char.</th><th>Temp. Range</th><th>Cap. Change (%)</th></tr> </thead> <tbody> <tr> <td>N</td><td>-55$^\circ C$ ~ +125$^\circ C$</td><td>$\pm 30ppm/^\circ C$</td></tr> </tbody> </table> Class II : <table border="1"> <thead> <tr> <th>Char.</th><th>Temp. Range</th><th>Cap. Change (%)</th></tr> </thead> <tbody> <tr> <td>X</td><td>-55$^\circ C$ ~ +125$^\circ C$</td><td>$\pm 15\%$</td></tr> <tr> <td>E</td><td>-30$^\circ C$ ~ +85$^\circ C$</td><td>+22% ~ -56%</td></tr> <tr> <td>Z</td><td>+10$^\circ C$ ~ +85$^\circ C$</td><td>+22% ~ -56%</td></tr> </tbody> </table>	Char.	Temp. Range	Cap. Change (%)	N	-55 $^\circ C$ ~ +125 $^\circ C$	$\pm 30ppm/^\circ C$	Char.	Temp. Range	Cap. Change (%)	X	-55 $^\circ C$ ~ +125 $^\circ C$	$\pm 15\%$	E	-30 $^\circ C$ ~ +85 $^\circ C$	+22% ~ -56%	Z	+10 $^\circ C$ ~ +85 $^\circ C$	+22% ~ -56%	Class I : [C2-C1/C1(T2-T1)] x 100% Class II : (C2-C1)/C1 x 100% T1 : Standard temperature (25 $^\circ C$) T2 : Test temperature C1 : Capacitance at standard temperature (25 $^\circ C$) C2 : Capacitance at test temperature (T2)
Char.	Temp. Range	Cap. Change (%)																		
N	-55 $^\circ C$ ~ +125 $^\circ C$	$\pm 30ppm/^\circ C$																		
Char.	Temp. Range	Cap. Change (%)																		
X	-55 $^\circ C$ ~ +125 $^\circ C$	$\pm 15\%$																		
E	-30 $^\circ C$ ~ +85 $^\circ C$	+22% ~ -56%																		
Z	+10 $^\circ C$ ~ +85 $^\circ C$	+22% ~ -56%																		
Adhesive Strength of Termination	No indication of peeling shall occur on the terminal electrode	A 5N f pull force shall be applied for 10 ± 1 second 																		
Resistance to Flexure of Substrate	Appearance : No mechanical damage shall be occur C-Meter : Capacitance Change N : $\leq \pm 5.0\%$ X : $\leq \pm 12.5\%$ E/Z : $\leq \pm 30.0\%$	Bending shall be applied to the 1.0mm with 1.0mm/sec 																		

NOTE : Specifications subject to change without notice. Please check our website for latest information.


15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 8

7. RELIABILITY & TEST CONDITION :

ITEM	PERFORMANCE	TEST CONDITION																									
Solderability	<p>More than 90% of the terminal surface is to be soldered newly, so metal part does not come out or dissolve</p> 	<p>Solder Temp. : 245±5°C Dip Time : 5±0.5sec Immersing Speed : 25±10% mm/s Solder : H63A Flux : Rosin Preheat : At 80~120°C for 10~30sec</p>																									
Resistance to Soldering Heat	<p>Appearance : No mechanical damage shall be occur</p> <p>Class I :</p> <table border="1"><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>N</td><td>Within ±2.5% or ±0.25pF whichever is larger of initial value</td></tr></table> <p>Class II :</p> <table border="1"><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>X</td><td>Within ±10%</td></tr><tr><td>Z/E</td><td>Within ±20%</td></tr></table> <p>Q(Class I), Tan δ(Class II), Insulation Resistance & Withstand Voltage : To satisfy the specified initial value</p>	Char.	Capacitance change	N	Within ±2.5% or ±0.25pF whichever is larger of initial value	Char.	Capacitance change	X	Within ±10%	Z/E	Within ±20%	<p>Class II capacitor shall be set for 48±4 hrs at room temp. after 1 hr heat treatment at 150+0/-10°C before initial measure. Preheat : At 150±10°C for 60~120sec Dip : Solder Temp. of 260±5°C Dip Time : 10±1sec Immersing speed : 25±10% mm/s Solder : H63A Flux : Rosin</p> <p>Measure at room temp. after cooling for Class I : 24±2 hrs Class II : 48±4 hrs</p>															
Char.	Capacitance change																										
N	Within ±2.5% or ±0.25pF whichever is larger of initial value																										
Char.	Capacitance change																										
X	Within ±10%																										
Z/E	Within ±20%																										
Temperature Cycle	<p>Appearance : No mechanical damage shall be occur</p> <p>Class I :</p> <table border="1"><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>N</td><td>Within ±2.5% or ±0.25pF whichever is larger of initial value</td></tr></table> <p>Class II :</p> <table border="1"><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>X/B</td><td>Within ±7.5%</td></tr><tr><td>Y/Z/E</td><td>Within ±20%</td></tr></table> <p>Q(Class I), Tan δ(Class II) & Insulation Resistance : To satisfy the specified initial value</p>	Char.	Capacitance change	N	Within ±2.5% or ±0.25pF whichever is larger of initial value	Char.	Capacitance change	X/B	Within ±7.5%	Y/Z/E	Within ±20%	<p>Class II capacitor shall be set for 48±4 hrs at room temp. after 1 hr heat treatment at 150+0/-10°C before initial measure.</p> <table border="1"><tr><th>Step</th><th>Temp. (°C)</th><th>Time (min)</th></tr><tr><td>1</td><td>Min. rated temp. +0/-3</td><td>30</td></tr><tr><td>2</td><td>25</td><td>3</td></tr><tr><td>3</td><td>Min. rated temp. +3/-0</td><td>30</td></tr><tr><td>4</td><td>25</td><td>3</td></tr></table> <p>Measure at room temp. after cooling for Class I : 24±2 hrs Class II : 48±4 hrs</p> <p>Solder the capacitor on P.C. board before testing</p>	Step	Temp. (°C)	Time (min)	1	Min. rated temp. +0/-3	30	2	25	3	3	Min. rated temp. +3/-0	30	4	25	3
Char.	Capacitance change																										
N	Within ±2.5% or ±0.25pF whichever is larger of initial value																										
Char.	Capacitance change																										
X/B	Within ±7.5%																										
Y/Z/E	Within ±20%																										
Step	Temp. (°C)	Time (min)																									
1	Min. rated temp. +0/-3	30																									
2	25	3																									
3	Min. rated temp. +3/-0	30																									
4	25	3																									
Humidity	<p>Appearance : No mechanical damage shall be occur</p> <p>Class I :</p> <table border="1"><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>N</td><td>Within ±5.0% or ±0.5pF whichever is larger of initial value</td></tr></table> <p>Class II :</p> <table border="1"><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>X</td><td>Within ±15%</td></tr><tr><td>Z/E</td><td>Within ±30%</td></tr></table>	Char.	Capacitance change	N	Within ±5.0% or ±0.5pF whichever is larger of initial value	Char.	Capacitance change	X	Within ±15%	Z/E	Within ±30%	<p>Class II capacitor shall be set for 48±4 hrs at room temp. after 1 hr heat treatment at 150+0/-10°C before initial measure. Temperature : 40±2°C Relative Humidity : 90~95% RH Test Time : 500 +12/-0 hr</p> <p>Measure at room temp. after cooling for Class I : 24±2 hrs Class II : 48±4 hrs</p> <p>Solder the capacitor on P.C. board before testing</p>															
Char.	Capacitance change																										
N	Within ±5.0% or ±0.5pF whichever is larger of initial value																										
Char.	Capacitance change																										
X	Within ±15%																										
Z/E	Within ±30%																										

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 9

7. RELIABILITY & TEST CONDITION :

ITEM	PERFORMANCE	TEST CONDITION																								
Humidity	<p>Q(Class I) :</p> <p>More than 30pF : $Q \geq 350$</p> <p>30pF & below : $Q \geq 275 + 2.5 \times C$</p> <p>Tan δ (Class II) :</p> <table><tr><td>Char.</td><td>Maximum</td></tr><tr><td>X</td><td>5.0%</td></tr><tr><td>Z/E</td><td>5.0%</td></tr></table> <p>Insulation Resistance :</p> <p>1,000MΩ or 50/C Ω whichever is smaller.</p>	Char.	Maximum	X	5.0%	Z/E	5.0%	<p>Class II capacitor shall be set for 48\pm4 hrs at room temp. after 1 hr heat treatment at 150+0/-10°C before initial measure.</p> <p>Temperature : 40\pm2°C</p> <p>Relative Humidity : 90~95% RH</p> <p>Test Time : 500 +12/-0 hr</p> <p>Measure at room temp. after cooling for</p> <p>Class I : 24\pm2 hrs</p> <p>Class II : 48\pm4 hrs</p> <p>Solder the capacitor on P.C. board before testing</p>																		
Char.	Maximum																									
X	5.0%																									
Z/E	5.0%																									
High Temperature Load	<p>Appearance :</p> <p>No mechanical damage shall be occur</p> <p>Class I :</p> <table><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>N</td><td>Within \pm3.0% or \pm0.3pF whichever is larger of initial value</td></tr></table> <p>Class II :</p> <table><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>X</td><td>Within \pm15%</td></tr><tr><td>Z/E</td><td>Within \pm30%</td></tr></table> <p>Q(Class I) :</p> <p>More than 30pF : $Q \geq 350$</p> <p>30pF & below : $Q \geq 275 + 2.5 \times C$</p> <p>Tan δ (Class II) :</p> <table><tr><td>Char.</td><td>Maximum</td></tr><tr><td>X</td><td>5.0%</td></tr><tr><td>Z/E</td><td>5.0%</td></tr></table> <p>Insulation Resistance :</p> <p>1,000MΩ or 50/C Ω whichever is smaller. (C in Farad)</p>	Char.	Capacitance change	N	Within \pm 3.0% or \pm 0.3pF whichever is larger of initial value	Char.	Capacitance change	X	Within \pm 15%	Z/E	Within \pm 30%	Char.	Maximum	X	5.0%	Z/E	5.0%	<p>Class II capacitors applied DC voltage (following table) is applied for 1 hr at max. operation temp. \pm3°C then shall be set for 48\pm4 hrs at room temp. and the initial measurement shall be conducted.</p> <p>Applied Voltage :</p> <table><tr><td>Rated Voltage</td><td>Applied Voltage</td></tr><tr><td>V \leq 250Vdc</td><td>150% rated voltage</td></tr><tr><td>Less than 1KVdc</td><td>120% rated voltage</td></tr><tr><td>More than 1KVdc (include 1KV)</td><td>100% rated voltage</td></tr></table> <p>Temp. : Max. operation temperature</p> <p>Test Time : 1000 +12/-0 hr</p> <p>Current Applied : 50mA max.</p> <p>Measure at room temp. after cooling for</p> <p>Class I : 24\pm2 hrs</p> <p>Class II : 48\pm4 hrs</p>	Rated Voltage	Applied Voltage	V \leq 250Vdc	150% rated voltage	Less than 1KVdc	120% rated voltage	More than 1KVdc (include 1KV)	100% rated voltage
Char.	Capacitance change																									
N	Within \pm 3.0% or \pm 0.3pF whichever is larger of initial value																									
Char.	Capacitance change																									
X	Within \pm 15%																									
Z/E	Within \pm 30%																									
Char.	Maximum																									
X	5.0%																									
Z/E	5.0%																									
Rated Voltage	Applied Voltage																									
V \leq 250Vdc	150% rated voltage																									
Less than 1KVdc	120% rated voltage																									
More than 1KVdc (include 1KV)	100% rated voltage																									
Vibration	<p>Appearance :</p> <p>No mechanical damage shall be occur</p> <p>Class I :</p> <table><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>N</td><td>Within \pm2.5% or \pm0.25pF whichever is larger of initial value</td></tr></table> <p>Class II :</p> <table><tr><td>Char.</td><td>Capacitance change</td></tr><tr><td>X</td><td>Within \pm7.5%</td></tr><tr><td>Z/E</td><td>Within \pm20%</td></tr></table> <p>Q(Class I), Tan δ(Class II) & Insulation Resistance : To satisfy the specified initial value</p>	Char.	Capacitance change	N	Within \pm 2.5% or \pm 0.25pF whichever is larger of initial value	Char.	Capacitance change	X	Within \pm 7.5%	Z/E	Within \pm 20%	<p>Solder the capacitor on P.C. board before testing</p> <p>Vibrate the capacitor with amplitude of 1.5mm P-P changing the frequencies from 10Hz to 55 Hz and back to 10Hz in about 1min.</p> <p>Repeat this for 2 hrs each in 3 perpendicular directions</p>														
Char.	Capacitance change																									
N	Within \pm 2.5% or \pm 0.25pF whichever is larger of initial value																									
Char.	Capacitance change																									
X	Within \pm 7.5%																									
Z/E	Within \pm 20%																									

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 10

8. SOLDERING AND MOUNTING :

8-1 Re-flow Soldering :

Preheat and gradual increase in temp. to the reflow temp. is recommended to decrease the potential of the thermal crack on the components. The recommended heating rate depends on the size of the component, however it should not exceed 3°C/sec.

8-2 Wave Soldering :

Most of the components are wave soldered with solder at 230~250°C. Adequate care must be taken to prevent the potential of thermal cracks on the ceramic capacitors. Refer to Figure 2 for optimum soldering benefits.

8-3 Hand Soldering :

Sudden temp. change in components, results in a temp. gradient, and therefore may cause internal thermal cracks in the components. In general a hand soldering method is not recommend unless proper preheating and handling practices have been taken. Care must also be taken not to touch the ceramic body of the capacitor with the tip of solder iron.

How to solder repair by solder iron :

1) Selection of soldering iron tip

The required temp. of solder iron for any type of repair depends on the type of the tip, the substrate material, and the solder land size

2) recommended solder iron condition

- Preheat substrate to (60°C~120°C).
- 350°C tip temperature (max)
- Never contact the ceramic with the iron tip
- 3.0mm tip diameter (max)
- Use a 30 watt (max.) soldering iron with tip diameter of 3.0mm
- Limit soldering time to 5 secs.

Cooling condition :

Natural cooling using air is recommended. If the chips are dipped into a solvent for cleaning, the temp. difference between the solvent and the chips must be less than 100°C.

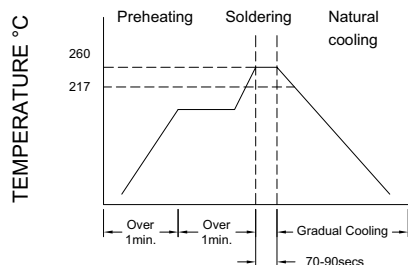


Figure 1. Re-flow Soldering

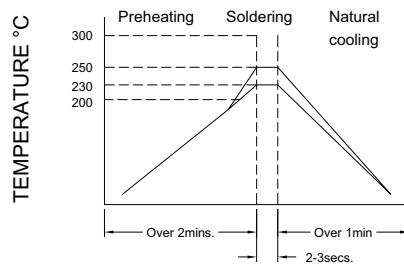


Figure 2. Wave Soldering

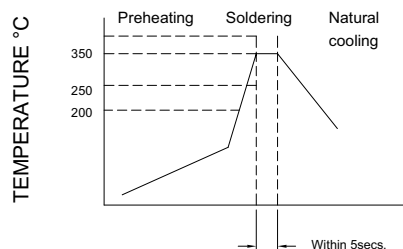


Figure 3. Hand Soldering



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008




SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 11


9. PACKAGING INFORMATION :

9-1. Reel Dimension

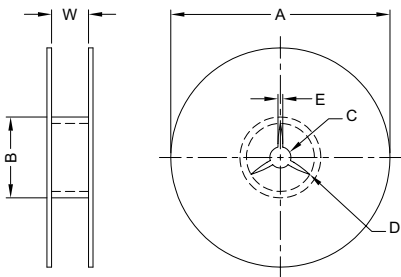


TYPE	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	W(mm)
V2	382 Max.	50 Min.	13±0.5	21±0.8	2.0±0.5	10±0.15
V3	382 Max.	50 Min.	13±0.5	21±0.8	2.0±0.5	10±0.15
V4	382 Max.	50 Min.	13±0.5	21±0.8	2.0±0.5	10±0.15
V5	382 Max.	50 Min.	13±0.5	21±0.8	2.0±0.5	10±0.15
V6	178±0.2	60±0.2	13±0.5	21±0.8	2.0±0.5	13±0.3
V7	178±0.2	60±0.2	13±0.5	21±0.8	2.0±0.5	13±0.3
V8	178±0.2	60±0.2	13±0.5	21±0.8	2.0±0.5	13±0.3

9-2. Tape Dimension

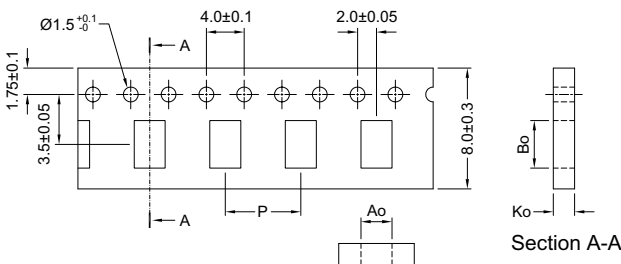

TYPE	Ao(mm)	Bo(mm)	Ko(mm)	P(mm)
V2	1.1±0.2	1.9±0.2	1.1 MAX.	4.0±0.1
V3	1.5±0.2	2.3±0.2	1.1 MAX.	4.0±0.1
V4	1.9±0.2	3.5±0.2	1.1 MAX.	4.0±0.1
V5	2.9±0.2	3.6±0.2	1.1 MAX.	4.0±0.1

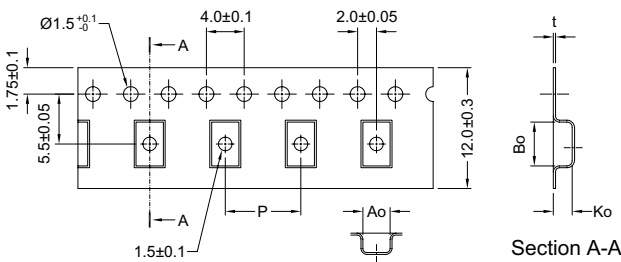

TYPE	Ao(mm)	Bo(mm)	Ko(mm)	P(mm)	t(mm)
V6	2.5±0.2	4.9±0.2	4.0 MAX.	4.0±0.1	0.3 MAX.
V7	3.6±0.2	4.9±0.2	4.0 MAX.	4.0±0.1	0.3 MAX.
V8	5.4±0.2	6.1±0.2	4.0 MAX.	4.0±0.1	0.3 MAX.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.




9-3. Packaging Quantity

Tape Mat'l	V2 / V3		V4		
	T≤0.90mm	T>0.90mm	T≤0.90mm	0.90mm<T≤1.25mm	T>1.25mm
Paper	4000pcs/reel	-	4000pcs/reel	-	-
Plastic	-	3000pcs/reel	-	3000pcs/reel	2000pcs/reel

Tape Mat'l	V5 / V6		V7 / V8	
	T≤1.25mm	T>1.25mm	T≤2.20mm	T>2.20mm
Paper	-	-	-	-
Plastic	3000pcs/reel	2000pcs/reel	1000pcs/reel	700pcs/reel

T : Chip Thickness

9-4. Tearing Off Force

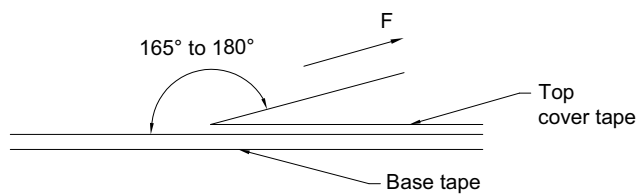

The force for tearing off cover tape is 5 to 70 grams in the arrow direction under the following conditions.

Storage

Store the capacitors where the temp. and relative humidity do not exceed 40°C and 70%RH. Capacitors are recommended to be used within 6 months from the date of manufacturing. Store the products in the original package and do not open the outer wrapped, polyethylene bag, till just before usage. If is open, seal it as soon as possible or keep it in a desiccant with a desiccation agent.



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD