


VMIACC-BT10*

Specifications

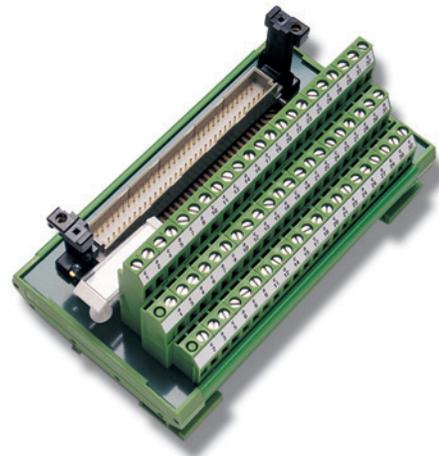

DIN Rail Transition Module for
Euro-DIN C 64-Pin, C 96-Pin, and
C/2 32-Pin Connectors

Features:

- DIN rail mount (15 or 35 mm)
- Interconnects GE's I/O boards with field wiring
- Provides easy-to-use lift clamp terminal blocks
- High-density design reduces cabinet space
- Accepts 24 to 12 AWG
- Fits standard DIN rails
- Interfaces with most GE I/O boards via mass-terminated cables
- IEC 664/IEC 664 A/DIN VDE; DIN VDE 0160 (in parts) compliant

Ordering Options						
Sept. 27, 2010 800-800563-000 B	A	B	C	D	E	F
VMIACC-BT10	-					
A = Male or Female 0 = Female 1 = Male BC = Number of Pins 32 = Euro-DIN C/2 32-Pin Connector 64 = Euro-DIN C 64-Pin Connector 96 = Euro-DIN C 96-Pin Connector						
For Ordering Information, Call: 1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859 Email: info.embeddedsystems.jp@ge.com Web Address: www.ge-ip.com						
Copyright © 2010 GE Intelligent Platforms Embedded Systems, Inc. All Rights Reserved. Specifications subject to change without notice.						

Functional Characteristics

Introduction: The VMIACC-BT10* DIN rail transition module provides a high-density, Euro-DIN C connector to three-level terminal transition in an easy-to-use DIN rail mount form factor. As shown in Figure 1, the VMIACC-BT10 simplifies field wiring interfaces by providing convenient lift clamp-style terminals while preserving the space efficiency of a pin-and-socket I/O board interface. I/O boards and transition modules can be interconnected by either cost-effective mass-terminated flat cables, or by specialty cables as the application demands. The following GE I/O boards are directly compatible with these modules.

Compatible I/O Boards:

VMIVME-1101	VMIVME-2200	VMIVME-3128
VMIVME-1110	VMIVME-2210	VMIVME-3413
VMIVME-1111	VMIVME-2510B	VMIVME-3417A
VMIVME-1128	VMIVME-2511	VMIVME-3418
VMIVME-1129	VMIVME-2528	VMIVME-3419
VMIVME-1130	VMIVME-2131	VMIVME-3451
VMIVME-1150	VMIVME-2532A	VMIVME-3456
VMIVME-1160A	VMIVME-2533	VMIVME-3457
VMIVME-1182	VMIVME-2536	VMIVME-3459
VMIVME-2120	VMIVME-2540	VMIVME-4140
VMIVME-2127	VMIVME-3113A	
VMIVME-2128	VMIVME-3118	
VMIVME-2131	VMIVME-3122	
VMIVME-2170A	VMIVME-3126A	

Compatible I/O Cables:

Number of Pins	Connector Type	Cable
64 pin	IDC	VMIVME-000-64-xxx
96 pin	IDC	VMIVME-000-96-xxx
C/2 32 pin	IDC	VMIVME-000-32-xxx

Electrical Data

The ampacity of the transition panel is limited by the DIN connectors of a 1 A per terminal.

Maximum Current: 1 A per terminal

Maximum Voltage: 125 VAC

Terminal Block Materials

Clamp: Steel, galvanized, and chromated

Wire Protection: CuZn, brass, prenickel, and 5 μ tin-plated

Screw: Steel, galvanized, and chromated

Physical/Environmental Specifications

Dimensions:

Height	3.03 in.
Width	6.65 in. (C 96), 5.321 in. (C 64 and C/2 32)
Depth	2.73 in. (mounted)

Screw: M3

Maximum Wire Diameter: Solid wired from 0.2 to 4 mm (12 to 22 AWG). Fine stranded wire from 0.2 to 2.5 mm² (12 to 24 AWG).

Trademarks

* indicates a trademark of GE Intelligent Platforms, Inc. and/or its affiliates. All other trademarks are the property of their respective owners.

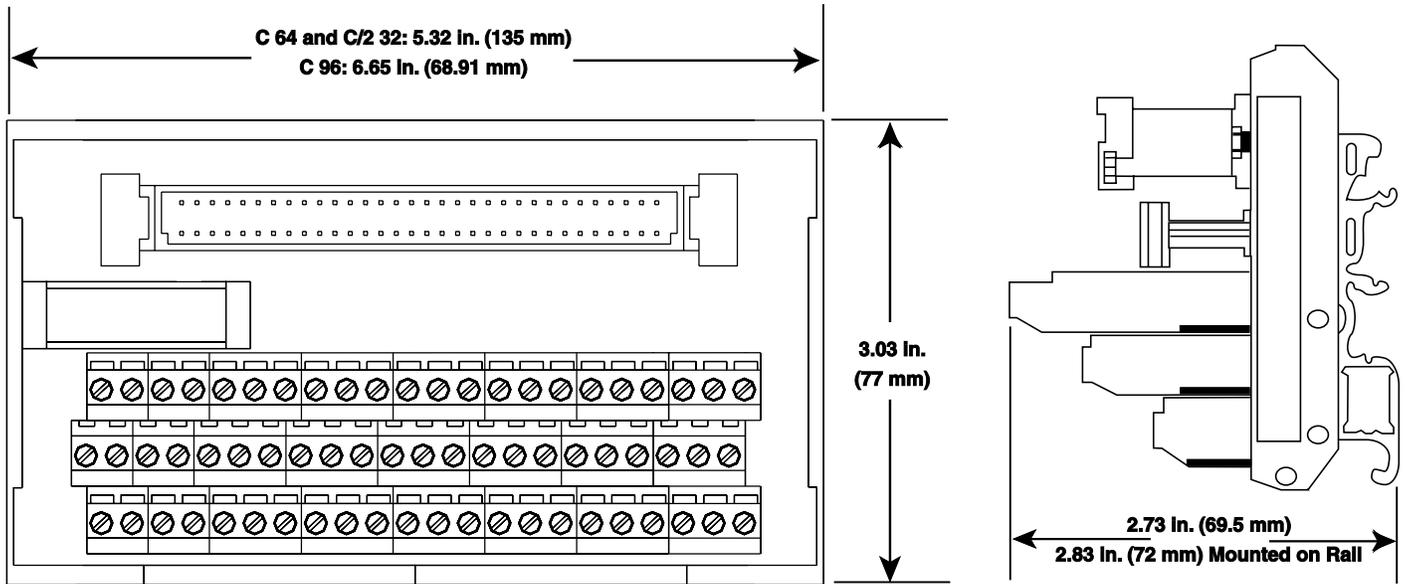


Figure 1. VMIACC-BT10 DIN Rail Transition Module



GE Intelligent Platforms
Information Centers

Americas:
1 800 322 3616 or 1 256 880 0444

Asia Pacific:
86 10 6561 1561

Europe, Middle East and Africa:
Germany +49 821 5034-0
UK +44 1327 359444

Additional Resources

For more information, please visit the
GE Intelligent Platforms Embedded Systems
web site at:

www.ge-ip.com