

## Operational Amplifiers / Comparators

# Ground Sense Operational Amplifiers




BA10358F/FV, BA10324AF/FV, BA2904S F/FV/FVM, BA2904F/FV/FVM  
BA2902SF/FV/KN, BA2902F/FV/KN, BA3404F/FVM

No.11049EBT15

## ●Description




General-purpose BA10358/BA10324A family and high-reliability BA2904 /BA2902 family integrate two or four independent Op-Amps and phase compensation capacitors on a single chip and have some features of high-gain, low power consumption, and operating voltage range of 3[V] to 32[V] (single power supply ). BA3404 family is realized high speed operation and reduces the crossover distortions that compare with BA10358 family.

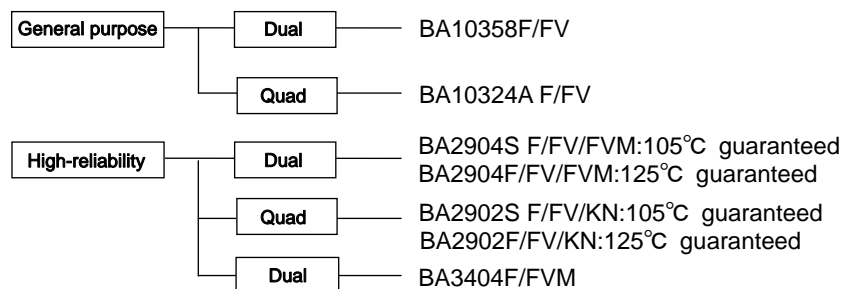

## ●Characteristics

- 1) Operable with a single power supply
- 2) Wide operating supply voltage  
+3.0[V]~+32.0[V]( single supply) (BA10358/BA10324A/BA2904/BA2902 family)  
+4.0[V]~+36.0[V]( single supply) (BA3404 family)
- 3) Standard Op-Amp Pin-assignments
- 4) Input and output are operable GND sense
- 5) Internal phase compensation type
- 6) Low supply current
- 7) High open loop voltage gain
- 8) Internal ESD protection  
Human body model (HBM)  $\pm 5000[V]$ (Typ.)(BA2904/BA2902/BA3404 family)
- 9) Gold PAD (BA2904/BA2902/BA3404 family)
- 10) Wide temperature range  
-40[°C]~+85[°C] (BA10358/BA10324/BA3404 family)  
-40[°C]~+105[°C] (BA2904S/BA2902S family)  
-40[°C]~+125[°C] (BA2904/BA2902 family)

## ●Pin Assignment



### SOP8

BA10358F  
BA2904SF  
BA2904F  
BA3404F

### SSOP-B8

BA10358FV  
BA2904SFV  
BA2904FV

### MSOP8

BA2904SFVM  
BA2904FVM  
BA3404FVM

### SOP14

BA10324AF  
BA2902SF  
BA2902F

### SSOP-B14

BA10324AFV  
BA2902SFV  
BA2902FV

### VQFN16

BA2902SKN  
BA2902KN

## ●Absolute Maximum Ratings (Ta=25[°C])

OBA10358 family, BA10324A family

| Parameter                                 | Symbol  | Ratings        |                 | Unit |
|---|---------|----------------|-----------------|------|
|   |         | BA10358 family | BA10324A family |      |
| Supply Voltage                            | VCC-VEE | +32            |                 | V    |
| Differential Input Voltage <sup>(*)</sup> | Vid     | VCC-VEE        |                 | V    |
| Input Common-mode Voltage Range           | Vicm    | (VEE-0.3)~VCC  |                 | V    |
| Operating Temperature Range               | Topr    | -40~+85        |                 | °C   |
| Storage Temperature Range                 | Tstg    | -55~+125       |                 | °C   |
| Maximum Junction Temperature              | Tjmax   | +125           |                 | °C   |

Note: Absolute maximum rating item indicates the condition which must not be exceeded. Application if voltage in excess of absolute maximum rating or use out of absolute maximum rated temperature environment may cause deterioration of characteristics.

(\*) The voltage difference between inverting input and non-inverting input is the differential input voltage.  
Then input terminal voltage is set to more than VEE.

## ●Electric Characteristics

OBA10358 family (Unless otherwise specified VCC=+5[V], VEE=0[V], Ta=25[°C])

| Parameter                            | Symbol | Temperature Range | Limits      |      |         | Unit | Condition  |
|--------------------------------------|--------|-------------------|-------------|------|---------|------|--|
|                                      |        |                   | BA10358F/FV |      |         |      |  |
|                                      |        |                   | Min.        | Typ. | Max.    |      |  |
| Input Offset Voltage <sup>(*)2</sup> | Vio    | 25°C              | -           | 2    | 7       | mV   | VOUT=1.4[V]  |
| Input Offset Current <sup>(*)2</sup> | Iio    | 25°C              | -           | 5    | 50      | nA   | VOUT=1.4[V]  |
| Input Bias Current <sup>(*)3</sup>   | Ib     | 25°C              | -           | 45   | 250     | nA   | VOUT=1.4[V]  |
| Supply Current                       | ICC    | 25°C              | -           | 0.7  | 1.2     | mA   | RL=∞ All Op-Amps   |
| Large Signal Voltage Gain            | AV     | 25°C              | 25          | 100  | -       | V/mV | RL≥2[kΩ],VCC=15[V],<br>VOUT=1.4~11.4[V]                    |
| Input Common-mode Voltage Range      | Vicm   | 25°C              | 0           | -    | VCC-1.5 | V    | (VCC-VEE)=5[V],<br>VOUT=VEE+1.4[V]                         |
| Common-mode Rejection Ratio          | CMRR   | 25°C              | 65          | 80   | -       | dB   | VOUT=1.4[V]  |
| Power Supply Rejection Ratio         | PSRR   | 25°C              | 65          | 100  | -       | dB   | VCC=5~30[V]  |
| Output Source Current                | IOH    | 25°C              | 10          | 20   | -       | mA   | VIN+=1[V],VIN-=0[V],<br>VOUT=0[V],<br>1CH is short circuit |
| Output Sink Current                  | IOL    | 25°C              | 10          | 20   | -       | mA   | VIN+=0[V],VIN-=1[V],<br>VOUT=5[V],<br>1CH is short circuit |
| Output Voltage Range                 | Vo     | 25°C              | 0           | -    | VCC-1.5 | V    | RL=2[kΩ]   |
| Channel Separation                   | CS     | 25°C              | -           | 120  | -       | dB   | f=1[kHz], input referred                                   |

(\*)2 Absolute value

(\*)3 Current direction: Since first input stage is composed with PNP transistor, input bias current flows out of IC.

OBA10324A family (Unless otherwise specified VCC=+5[V], VEE=0[V], Ta=25[°C])

| Parameter                            | Symbol | Temperature Range | Limits        |      |         | Unit | Condition   |
|--------------------------------------|--------|-------------------|---------------|------|---------|------|---|
|                                      |        |                   | BA10324A F/FV |      |         |      |   |
|                                      |        |                   | Min.          | Typ. | Max.    |      |   |
| Input Offset Voltage <sup>(*4)</sup> | Vio    | 25°C              | -             | 2    | 7       | mV   | VOUT=1.4[V]   |
| Input Offset Current <sup>(*4)</sup> | Iio    | 25°C              | -             | 5    | 50      | nA   | VOUT=1.4[V]   |
| Input Bias Current <sup>(*5)</sup>   | Ib     | 25°C              | -             | 20   | 250     | nA   | VOUT=1.4[V]   |
| Supply Current                       | ICC    | 25°C              | -             | 0.6  | 2       | mA   | RL=∞ All Op-Amps  |
| High Level Output Voltage            | VOH    | 25°C              | 3.5           | -    | -       | V    | RL=2[kΩ]  |
| Low Level Output Voltage             | VOL    | 25°C              | -             | -    | 250     | mV   | RL=∞ All Op-Amps  |
| Large Signal Voltage Gain            | AV     | 25°C              | 25            | 100  | -       | V/mV | RL ≥ 2[kΩ], VCC=15[V],<br>VOUT=1.4 ~ 11.4[V]                |
| Input Common-mode Voltage range      | Vicm   | 25°C              | 0             | -    | VCC-1.5 | V    | (VCC-VEE)=5[V],<br>VOUT=VEE+1.4[V]                          |
| Common-mode Rejection Ratio          | CMRR   | 25°C              | 65            | 75   | -       | dB   | VOUT=1.4[V]   |
| Power Supply Rejection Ratio         | PSRR   | 25°C              | 65            | 100  | -       | dB   | VCC=5 ~ 30[V]   |
| Output Source Current                | IOH    | 25°C              | 20            | 35   | -       | mA   | VIN+=1[V], VIN-=0[V],<br>VOUT=0[V],<br>1CH is short circuit |
| Output Sink Current                  | IOL    | 25°C              | 10            | 20   | -       | mA   | VIN+=0[V], VIN-=1[V],<br>VOUT=5[V]<br>1CH is short circuit  |
| Channel Separation                   | CS     | 25°C              | -             | 120  | -       | dB   | f=1[kHz], input referred                                    |

(\*4) Absolute value

(\*5) Current direction: Since first input stage is composed with PNP transistor, input bias current flows out of IC.

## ●Absolute Maximum Ratings (Ta=25[°C])

OBA2904/BA2902 family

| Parameter                                   | Symbol  | Ratings                             |                                 | Unit |
|---|---------|-------------------------------------|---------------------------------|------|
|   |         | BA2904S F/FV/FVM<br>BA2902S F/FV/KN | BA2904F/FV/FVM<br>BA2902F/FV/KN |      |
| Supply Voltage                              | VCC-VEE | +32                                 |                                 | V    |
| Differential Input Voltage <sup>(*)6)</sup> | Vid     | 32                                  |                                 | V    |
| Input Common-mode Voltage Range             | Vicm    | (VEE-0.3)~(VEE+32)                  |                                 | V    |
| Operating Temperature Range                 | Topr    | -40~+105                            | -40~+125                        | °C   |
| Storage Temperature Range                   | Tstg    | -55~+150                            |                                 | °C   |
| Maximum Junction Temperature                | Tjmax   | +150                                |                                 | °C   |

Note: Absolute maximum rating item indicates the condition which must not be exceeded.

Application if voltage in excess of absolute maximum rating or use out of absolute maximum rated temperature environment may cause deterioration of characteristics.

(\*)6) The voltage difference between inverting input and non-inverting input is the differential input voltage. Then input terminal voltage is set to more than VEE.

## ●Electric Characteristics

OBA2904 family (Unless otherwise specified VCC=+5[V], VEE=0[V])

| Parameter   | Symbol  | Temperature Range | Limits                             |      |         | Unit   | Condition  |
|---|---------|-------------------|------------------------------------|------|---------|--------|--|
|   |         |                   | BA2904S F/FV/FVM<br>BA2904F/FV/FVM |      |         |        |  |
|   |         |                   | Min.                               | Typ. | Max.    |        |  |
| Input Offset Voltage <sup>(*)7)</sup> <sup>(*)8)</sup>  | Vio     | 25°C              | -                                  | 2    | 7       | mV     | VOUT=1.4[V]  |
|   |         | Full range        | -                                  | -    | 10      |        | VCC=5~30[V], VOUT=1.4[V]                               |
| Input Offset Voltage Drift                              | ΔVio/ΔT | -                 | -                                  | ±7   | -       | μV/°C  | VOUT=1.4[V]  |
| Input Offset Current <sup>(*)7)</sup> <sup>(*)8)</sup>  | Iio     | 25°C              | -                                  | 2    | 50      | nA     | VOUT=1.4[V]  |
|   |         | Full range        | -                                  | -    | 200     |        |  |
| Input Offset Current Drift                              | ΔIio/ΔT | -                 | -                                  | ±10  | -       | pA/°C  | VOUT=1.4[V]  |
| Input Bias Current <sup>(*)7)</sup> <sup>(*)8)</sup>    | Ib      | 25°C              | -                                  | 20   | 250     | nA     | VOUT=1.4[V]  |
|   |         | Full range        | -                                  | -    | 250     |        |  |
| Supply Current <sup>(*)8)</sup>                         | ICC     | 25°C              | -                                  | 0.7  | 1.2     | mA     | RL=∞All Op-Amps  |
|   |         | Full range        | -                                  | -    | 2       |        |  |
| High Level Output Voltage <sup>(*)8)</sup>              | VOH     | 25°C              | 3.5                                | -    | -       | V      | RL=2[kΩ]   |
|   |         | Full range        | 27                                 | 28   | -       |        | VCC=30[V], RL=10[kΩ]                                   |
| Low Level Output Voltage <sup>(*)8)</sup>               | VOL     | Full range        | -                                  | 5    | 20      | mV     | RL=∞ All Op-Amps                                       |
| Large Signal Voltage Gain                               | AV      | 25°C              | 25                                 | 100  | -       | V/mV   | RL≥2[kΩ], VCC=15[V]<br>VOUT=1.4~11.4[V]                |
| Input Common-mode Voltage Range                         | Vicm    | 25°C              | 0                                  | -    | VCC-1.5 | V      | (VCC-VEE)=5[V],<br>VOUT=VEE+1.4[V]                     |
| Common-mode Rejection Ratio                             | CMRR    | 25°C              | 50                                 | 80   | -       | dB     | VOUT=1.4[V]  |
| Power Supply Rejection Ratio                            | PSRR    | 25°C              | 65                                 | 100  | -       | dB     | VCC=5~30[V]  |
| Output Source Current <sup>(*)8)</sup> <sup>(*)9)</sup> | IOH     | 25°C              | 20                                 | 30   | -       | mA     | VIN+=1[V], VIN-=0[V]<br>VOUT=0[V] 1CH is short circuit |
|   |         | Full range        | 10                                 | -    | -       |        |  |
| Output Sink Current <sup>(*)8)</sup> <sup>(*)9)</sup>   | IOL     | 25°C              | 10                                 | 20   | -       | mA     | VIN+=0[V], VIN-=1[V]<br>VOUT=5[V] 1CH is short circuit |
|   |         | Full range        | 2                                  | -    | -       |        |  |
|   | Isink   | 25°C              | 12                                 | 40   | -       | μA     | VIN+=0[V], VIN-=1[V]<br>VOUT=200[mV]                   |
| Channel Separation                                      | CS      | 25°C              | -                                  | 120  | -       | dB     | f=1[kHz], input referred                               |
| Slew rate   | SR      | 25°C              | -                                  | 0.2  | -       | V/μs   | VCC=15[V], AV=0[dB],<br>RL=2[kΩ], CL=100[pF]           |
| Maximum frequency                                       | ft      | 25°C              | -                                  | 0.5  | -       | MHz    | VCC=30[V], RL=2[kΩ],<br>CL=100[pF]                     |
| Input referred noise voltage                            | Vn      | 25°C              | -                                  | 40   | -       | nV/√Hz | VCC=15[V], VEE=-15[V],<br>RS=100[Ω], Vi=0[V], f=1[kHz] |

(\*)7) Absolute value

(\*)8) BA2904S family: Full range -40~+105°C BA2904 family: Full range -40~+125°C

(\*)9) Under high temperatures, please consider the power dissipation when selecting the output current.

When the output terminal is continuously shorted the output current reduces the internal temperature by flushing.

OBA2902 family (Unless otherwise specified VCC=+5[V], VEE=0[V])

| Parameter  | Symbol            | Temperature Range | Limits                           |      |         | Unit   | Condition  |
|--|-------------------|-------------------|----------------------------------|------|---------|--------|--|
|  |                   |                   | BA2902S F/FV/KN<br>BA2902F/FV/KN |      |         |        |  |
|  |                   |                   | Min.                             | Typ. | Max.    |        |  |
| Input Offset Voltage <sup>(*)10)</sup> <sup>(*)11)</sup> | Vio               | 25°C              | -                                | 2    | 7       | mV     | VOUT=1.4[V]  |
|  |                   | Full range        | -                                | -    | 10      |        | VCC=5~30[V], VOUT=1.4[V]                               |
| Input Offset Voltage Drift                               | ΔVio/ΔT           | -                 | -                                | ±7   | -       | μV/°C  | VOUT=1.4[V]  |
| Input Offset Current <sup>(*)10)</sup> <sup>(*)11)</sup> | Iio               | 25°C              | -                                | 2    | 50      | nA     | VOUT=1.4[V]  |
|  |                   | Full range        | -                                | -    | 200     |        |  |
| Input Offset Current Drift                               | ΔIio/ΔT           | -                 | -                                | ±10  | -       | pA/°C  | VOUT=1.4[V]  |
| Input Bias Current <sup>(*)10)</sup> <sup>(*)11)</sup>   | Ib                | 25°C              | -                                | 20   | 250     | nA     | VOUT=1.4[V]  |
|  |                   | Full range        | -                                | -    | 250     |        |  |
| Supply Current <sup>(*)10)</sup>                         | ICC               | 25°C              | -                                | 0.7  | 2       | mA     | RL=∞ All Op-Amps                                       |
|  |                   | Full range        | -                                | -    | 3       |        |  |
| High Level Output Voltage <sup>(*)11)</sup>              | VOH               | 25°C              | 3.5                              | -    | -       | V      | RL=2[kΩ]   |
|  |                   | Full range        | 27                               | 28   | -       |        | VCC=30[V], RL=10[kΩ]                                   |
| Low Level Output Voltage <sup>(*)11)</sup>               | VOL               | Full range        | -                                | 5    | 20      | mV     | RL=∞All Op-Amps  |
| Large Signal Voltage Gain                                | AV                | 25°C              | 25                               | 100  | -       | V/mV   | RL≥2[kΩ], VCC=15[V]<br>VOUT=1.4~11.4[V]                |
| Input Common-mode Voltage Range                          | Vicm              | 25°C              | 0                                | -    | VCC-1.5 | V      | (VCC-VEE)=5[V],<br>VOUT=VEE+1.4[V]                     |
| Common-mode Rejection Ratio                              | CMRR              | 25°C              | 50                               | 80   | -       | dB     | VOUT=1.4[V]  |
| Power Supply Rejection Ratio                             | PSRR              | 25°C              | 65                               | 100  | -       | dB     | VCC=5~30[V]  |
| Output SourceCurrent <sup>(*)11)</sup> <sup>(*)12)</sup> | IOH               | 25°C              | 20                               | 30   | -       | mA     | VIN+=1[V], VIN-=0[V]<br>VOUT=0[V] 1CH is short circuit |
|  |                   | Full range        | 10                               | -    | -       |        |  |
| Output Sink Current <sup>(*)11)</sup> <sup>(*)12)</sup>  | IOL               | 25°C              | 10                               | 20   | -       | mA     | VIN+=0[V], VIN-=1[V]<br>VOUT=5[V] 1CH is short circuit |
|  |                   | Full range        | 2                                | -    | -       |        |  |
|  | I <sub>sink</sub> | 25°C              | 12                               | 40   | -       | μA     | VIN+=0[V], VIN-=1[V]<br>VOUT=200[mV]                   |
| Channel Separation                                       | CS                | 25°C              | -                                | 120  | -       | dB     | f=1[kHz], input referred                               |
| Slew rate  | SR                | 25°C              | -                                | 0.2  | -       | V/μs   | VCC=15[V], AV=0[dB],<br>RL=2[kΩ], CL=100[pF]           |
| Maximum frequency  | ft                | 25°C              | -                                | 0.5  | -       | MHz    | VCC=30[V], RL=2[kΩ],<br>CL=100[pF]                     |
| Input referred noise voltage                             | Vn                | 25°C              | -                                | 40   | -       | nV/√Hz | VCC=15[V], VEE=-15[V],<br>RS=100[Ω], Vi=0[V], f=1[kHz] |

(\*)10) Absolute value

(\*)11) BA2902S family: Full range -40~+105°C, BA2902 family: Full range -40~+125°C

(\*)12) Under high temperatures, please consider the power dissipation when selecting the output current.

When the output terminal is continuously shorted the output current reduces the internal temperature by flushing.

## ●Absolute Maximum Ratings (Ta=25[°C])

OBA3404 family

| Parameter                                    | Symbol  | Ratings            | Unit |
|--|---------|--------------------|------|
| Supply Voltage                               | VCC-VEE | +36                | V    |
| Differential Input Voltage <sup>(*)13)</sup> | Vid     | 36                 | V    |
| Input Common-mode Voltage Range              | Vicm    | (VEE-0.3)~(VEE+36) | V    |
| Operating Temperature Range                  | Topr    | -40~+85            | °C   |
| Storage Temperature Range                    | Tstg    | -55~+150           | °C   |
| Maximum Junction Temperature                 | Tjmax   | +150               | °C   |

Note: Absolute maximum rating item indicates the condition which must not be exceeded.

Application if voltage in excess of absolute maximum rating or use out of absolute maximum rated temperature environment may cause deterioration of characteristics.

(\*)13) The voltage difference between inverting input and non-inverting input is the differential input voltage.  
Then input terminal voltage is set to more than VEE.

## ●Electric Characteristics


OBA3404 family (Unless otherwise specified VCC=+15[V], VEE=-15[V], Ta=25[°C])

| Parameter                              | Symbol  | Temperature Range | Limits        |      |      | Unit | Condition  |
|--|---------|-------------------|---------------|------|------|------|--|
|  |         |                   | BA3404 family |      |      |      |  |
|  |         |                   | Min.          | Typ. | Max. |      |  |
| Input Offset Voltage <sup>(*)14)</sup> | Vio     | 25°C              | -             | 2    | 5    | mV   | VOUT=0[V], Vicm=0[V]   |
| Input Offset Current <sup>(*)14)</sup> | Iio     | 25°C              | -             | 5    | 50   | nA   | VOUT=0[V], Vicm=0[V]   |
| Input Bias Current <sup>(*)14)</sup>   | Ib      | 25°C              | -             | 70   | 200  | nA   | VOUT=0[V], Vicm=0[V]   |
| Large Signal Voltage Gain              | AV      | 25°C              | 88            | 100  | -    | dB   | RL ≥ 2[kΩ],<br>VOUT=±10[V],Vicm=0[V]                                 |
| Maximum Output Voltage                 | VOM     | 25°C              | ±13           | ±14  | -    | V    | RL ≥ 2[kΩ]   |
| Input Common-mode Voltage Range        | Vicm    | 25°C              | -15           | -    | 13   | V    | VOUT=0[V]  |
| Common-mode Rejection Ratio            | CMRR    | 25°C              | 70            | 90   | -    | dB   | VOUT=0[V],<br>Vicm=-15[V] ~ +13[V]                                   |
| Power Supply Rejection Ratio           | PSRR    | 25°C              | 80            | 94   | -    | dB   | Ri ≤ 10[kΩ],<br>VCC=+4[V] ~ +30[V]                                   |
| Supply Current                         | ICC     | 25°C              | -             | 2.0  | 3.5  | mA   | RL=∞ All Op-Amps,<br>VIN+=0[V]                                       |
| Output Source Current                  | Isource | 25°C              | 20            | 30   | -    | mA   | VIN+=1[V],VIN=0[V],<br>VOUT=+12[V],<br>Output of one channel only    |
| Output Sink Current                    | Isink   | 25°C              | 10            | 20   | -    | mA   | VIN+=0[V], VIN=-1[V],<br>VOUT= -12[V],<br>Output of one channel only |
| Slew rate                              | SR      | 25°C              | -             | 1.2  | -    | V/μs | AV=0[dB],<br>RL=2[kΩ],CL=100[pF]                                     |
| Unity Gain Frequency                   | ft      | 25°C              | -             | 1.2  | -    | MHz  | RL=2[kΩ]   |
| Total Harmonic Distortion              | THD     | 25°C              | -             | 0.1  | -    | %    | VOUT=10[Vp-p],f=20[kHz],<br>AV=0[dB],RL=2[kΩ]                        |


(\*)14) Absolute value

●Reference Data (The data is ability value of sample, it is not guaranteed.)


OBA10358 family

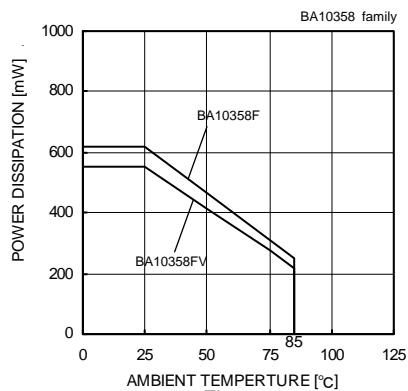


Derating Curve

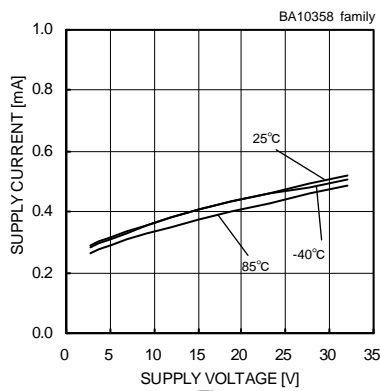


Supply Current - Supply Voltage

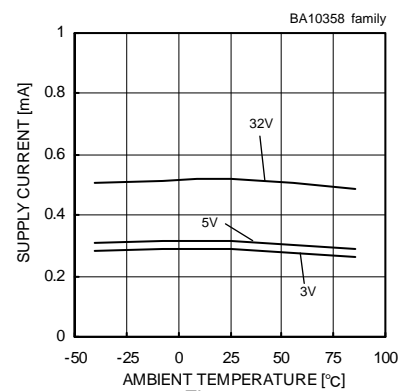


Supply Current - Ambient Temperature

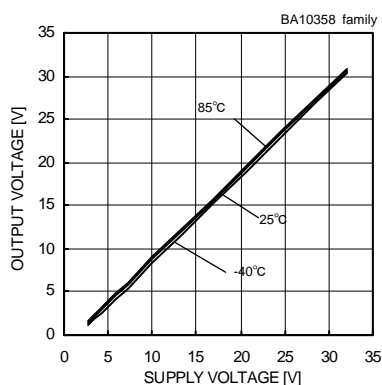


Maximum Output Voltage - Supply Voltage  
( $R_L=10[k\Omega]$ )

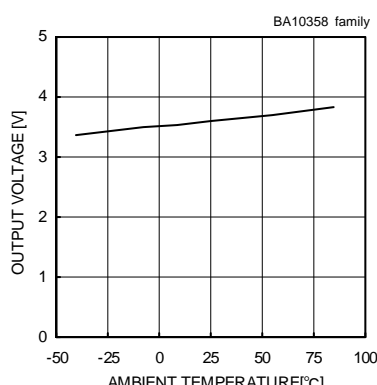


Maximum Output Voltage - Ambient Temperature  
( $V_{CC}=5[V]$ ,  $R_L=2[k\Omega]$ )

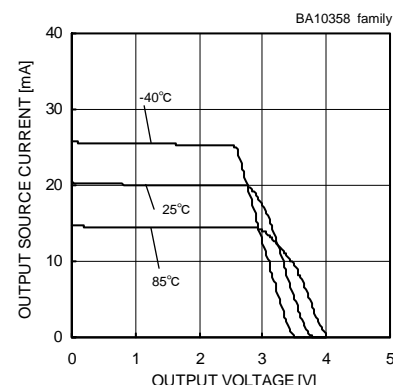


Output Source Current - Output Voltage  
( $V_{CC}=5[V]$ )

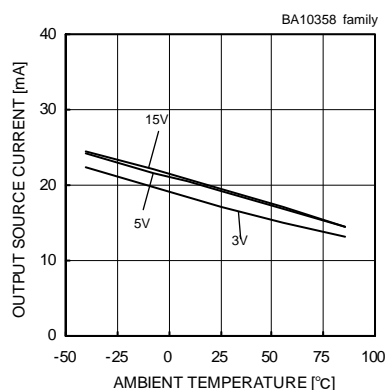


Output Source Current - Ambient Temperature  
( $V_{OUT}=0[V]$ )

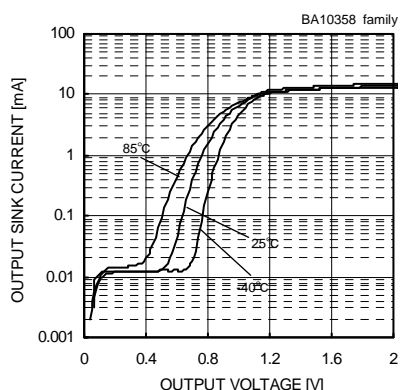


Output Sink Current - Output Voltage  
( $V_{CC}=5[V]$ )

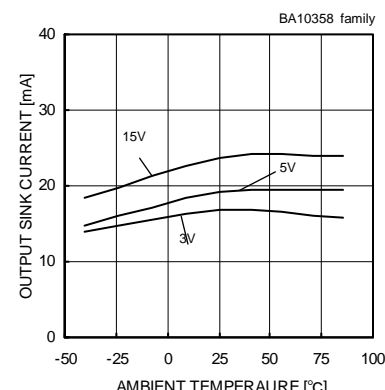


Output Sink Current - Ambient Temperature  
( $V_{OUT}=V_{CC}$ )

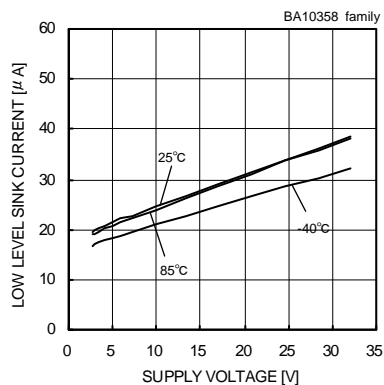

Low Level Sink Current - Supply Voltage  
( $V_{OUT}=0.2[V]$ )

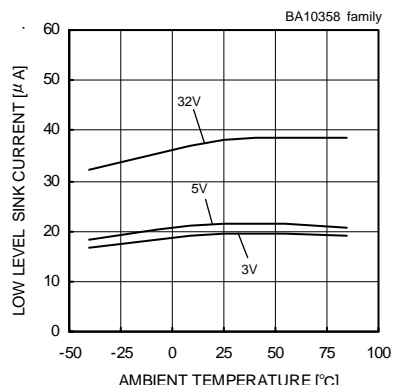

Low Level Sink Current - Ambient Temperature  
( $V_{OUT}=0.2[V]$ )

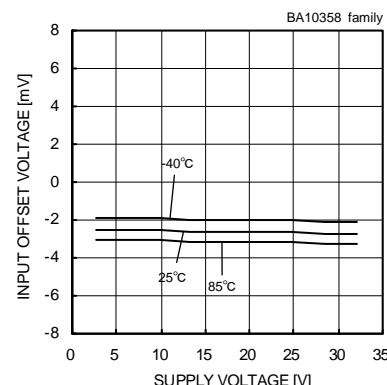

Input Offset Voltage - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

OBA10358 family

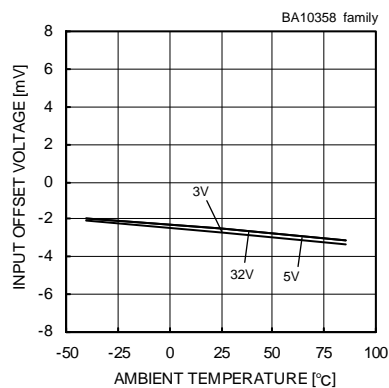


Fig. 13

Input Offset Voltage - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

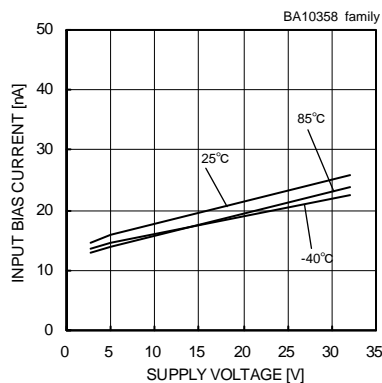


Fig. 14

Input Bias Current - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

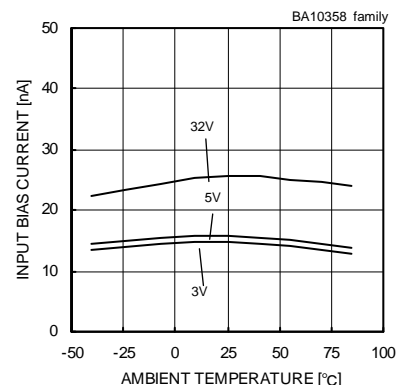


Fig. 15

Input Bias Current - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

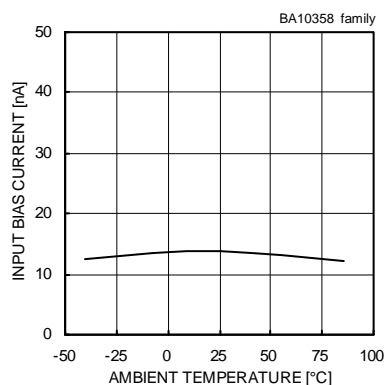


Fig. 16

Input Bias Current - Ambient Temperature  
( $V_{CC}=30[V]$ ,  $V_{icm}=28[V]$ ,  $V_{OUT}=1.4[V]$ )

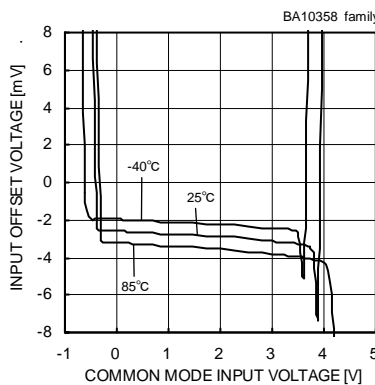


Fig. 17

Input Offset Voltage - Common Mode Input Voltage  
( $V_{CC}=5[V]$ )

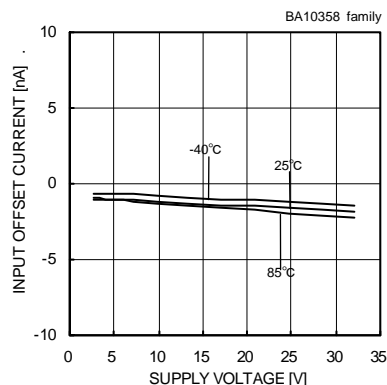


Fig. 18

Input Offset Current - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

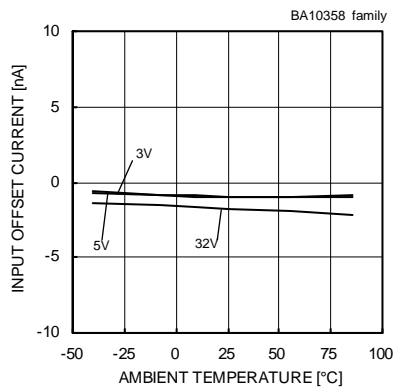


Fig. 19

Input Offset Current - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

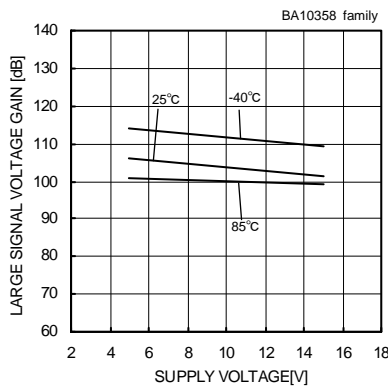


Fig. 20

Large Signal Voltage Gain - Supply Voltage  
( $R_L=2[k\Omega]$ )

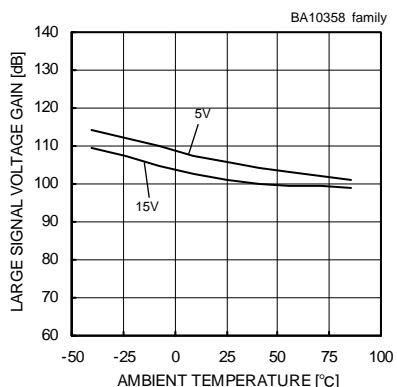


Fig. 21

Large Signal Voltage Gain - Ambient Temperature  
( $R_L=2[k\Omega]$ )

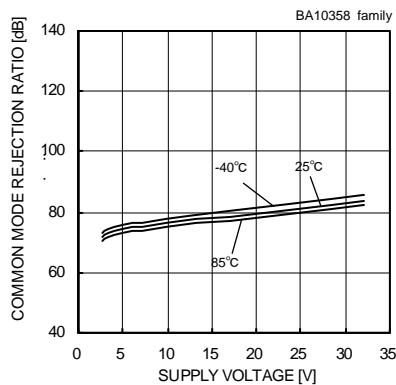


Fig. 22

Common Mode Rejection Ratio  
- Supply Voltage

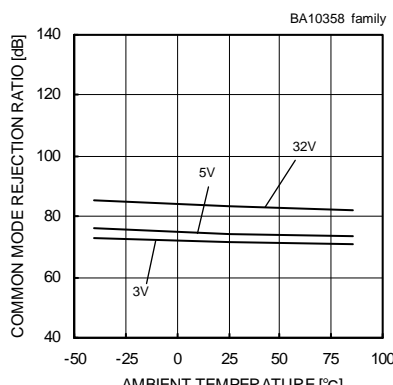


Fig. 23

Common Mode Rejection Ratio  
- Ambient Temperature

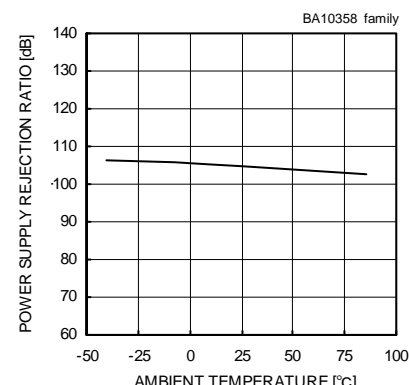


Fig. 24

Power Supply Rejection Ratio  
- Ambient Temperature

OBA10324A family

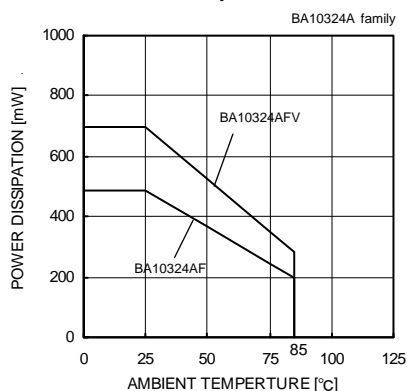


Fig. 25  
Derating Curve

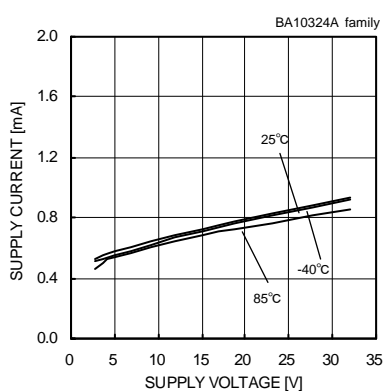


Fig. 26  
Supply Current - Supply Voltage

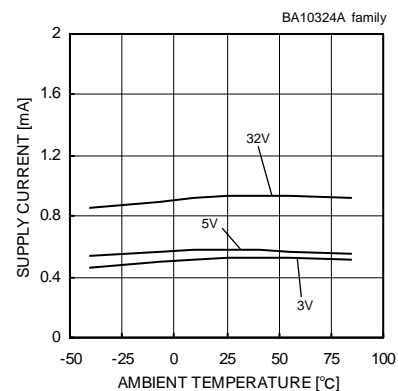


Fig. 27  
Supply Current - Ambient Temperature

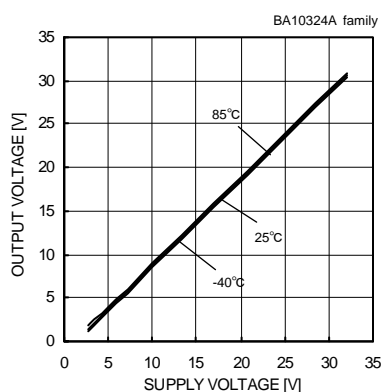


Fig. 28  
Maximum Output Voltage - Supply Voltage  
( $R_L=10[k\Omega]$ )

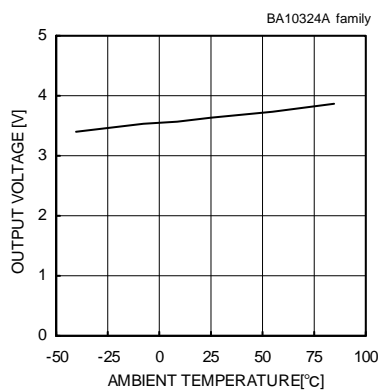


Fig. 29  
Maximum Output Voltage - Ambient Temperature  
( $V_{CC}=5[V]$ ,  $R_L=2[k\Omega]$ )

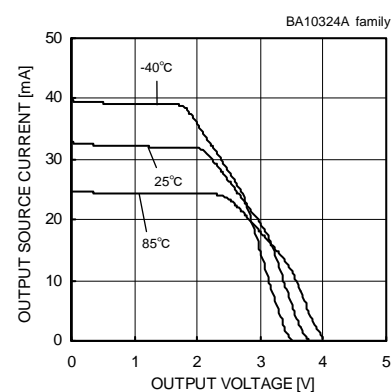


Fig. 30  
Output Source Current - Output Voltage  
( $V_{CC}=5[V]$ )

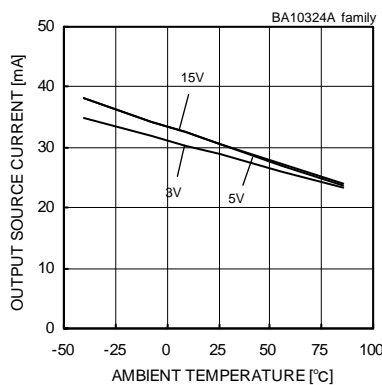


Fig. 31  
Output Source Current - Ambient Temperature  
( $V_{OUT}=0[V]$ )

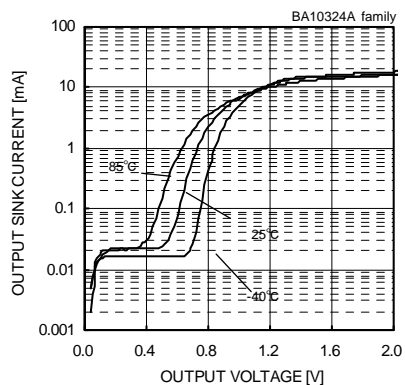


Fig. 32  
Output Sink Current - Output Voltage  
( $V_{CC}=5[V]$ )

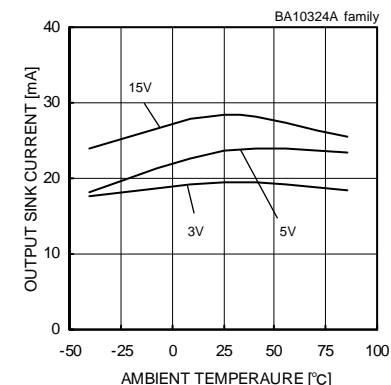


Fig. 33  
Output Sink Current - Ambient Temperature  
( $V_{OUT}=V_{CC}$ )

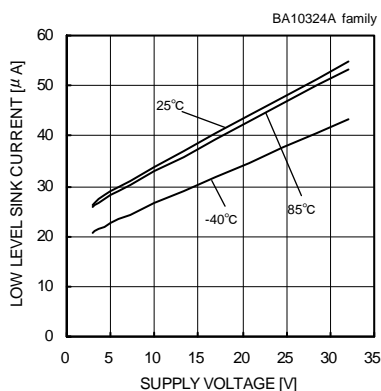


Fig. 34  
Low Level Sink Current - Supply Voltage  
( $V_{OUT}=0.2[V]$ )

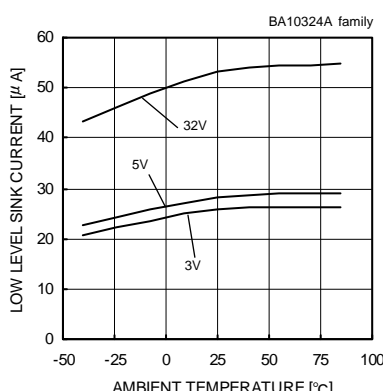


Fig. 35  
Low Level Sink Current - Ambient Temperature  
( $V_{OUT}=0.2[V]$ )

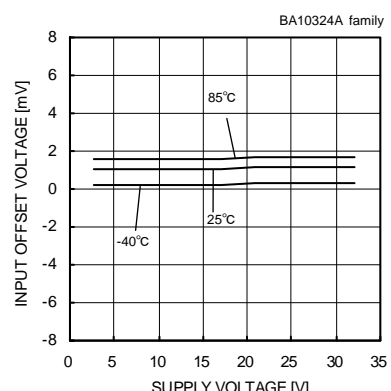


Fig. 36  
Input Offset Voltage - Supply Voltage  
( $V_{cm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

OBA10324A family

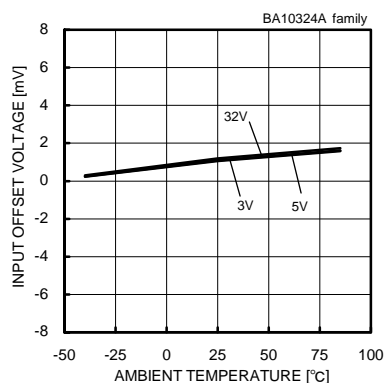


Fig. 37

Input Offset Voltage - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

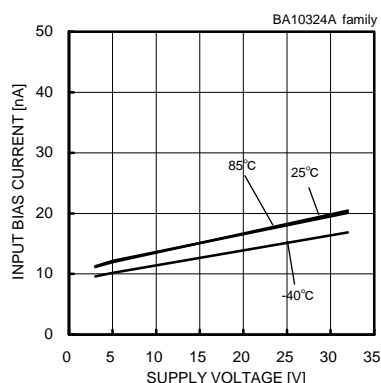


Fig. 38

Input Bias Current - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

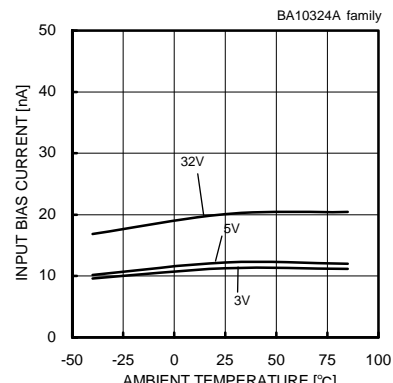


Fig. 39

Input Bias Current - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

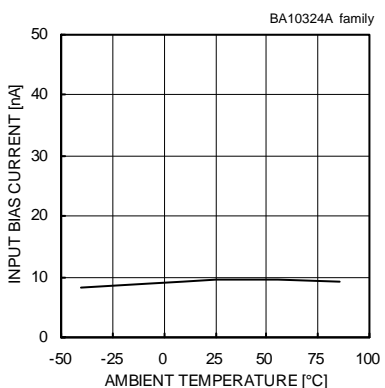


Fig. 40

Input Bias Current - Ambient Temperature  
( $V_{CC}=30[V]$ ,  $V_{icm}=28[V]$ ,  $V_{OUT}=1.4[V]$ )

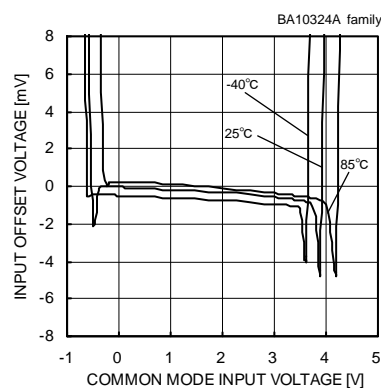


Fig. 41

Input Offset Voltage - Common Mode Input Voltage  
( $V_{CC}=5[V]$ )

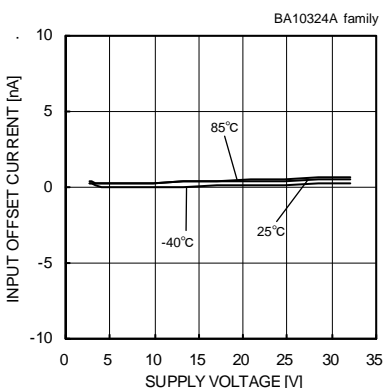


Fig. 42

Input Offset Current - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

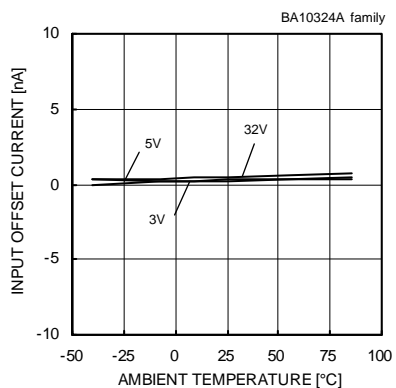


Fig. 43

Input Offset Current - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

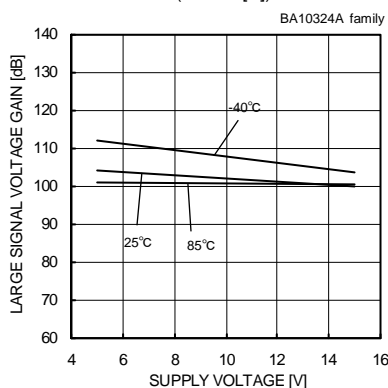


Fig. 44

Large Signal Voltage Gain - Supply Voltage  
( $R_L=2[k\Omega]$ )

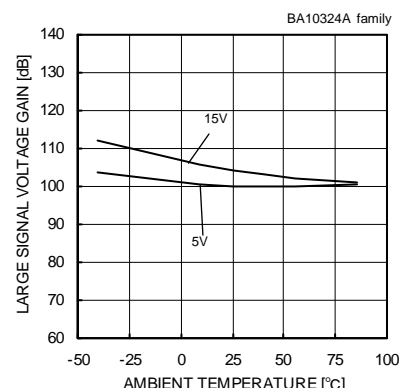


Fig. 45

Large Signal Voltage Gain - Ambient Temperature  
( $R_L=2[k\Omega]$ )

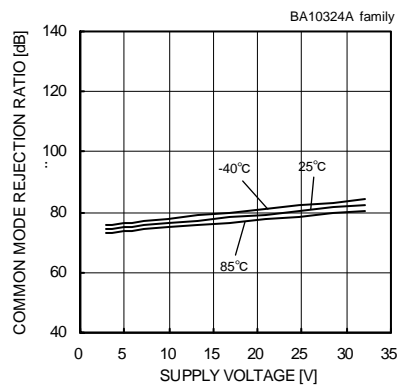


Fig. 46

Common Mode Rejection Ratio - Supply Voltage

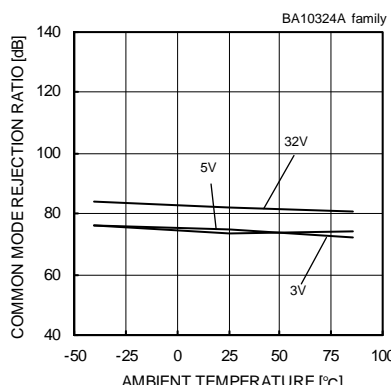


Fig. 47

Common Mode Rejection Ratio - Ambient Temperature

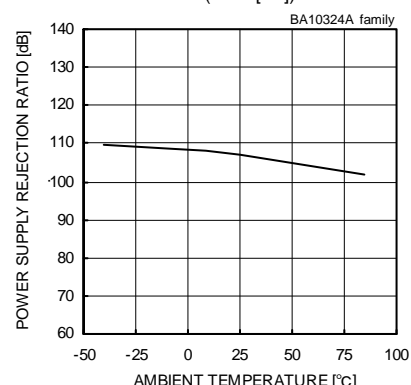


Fig. 48

Power Supply Rejection Ratio - Ambient Temperature

OBA2904 family

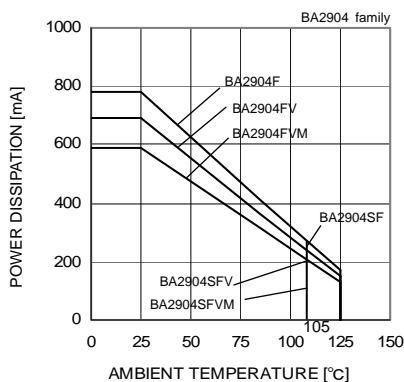


Fig. 49  
Derating Curve

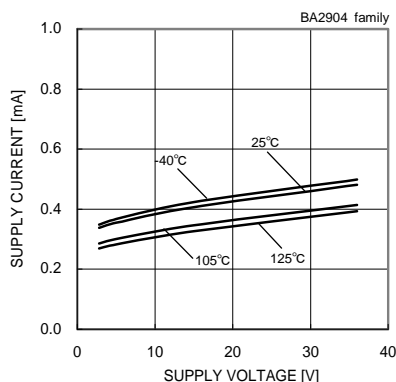


Fig. 50  
Supply Current - Supply Voltage

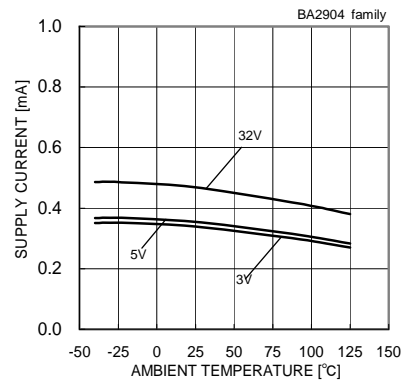


Fig. 51  
Supply Current - Ambient Temperature

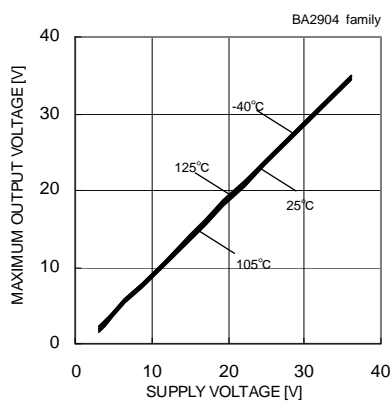


Fig. 52  
Maximum Output Voltage - Supply Voltage  
( $R_L=10[k\Omega]$ )

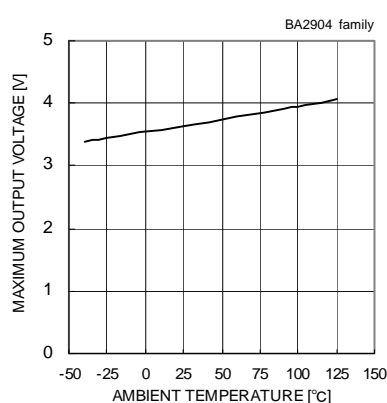


Fig. 53  
Maximum Output Voltage - Ambient Temperature  
( $V_{CC}=5[V]$ ,  $R_L=2[k\Omega]$ )

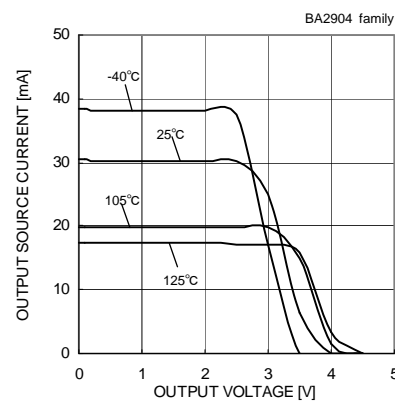


Fig. 54  
Output Source Current - Output Voltage  
( $V_{CC}=5[V]$ )

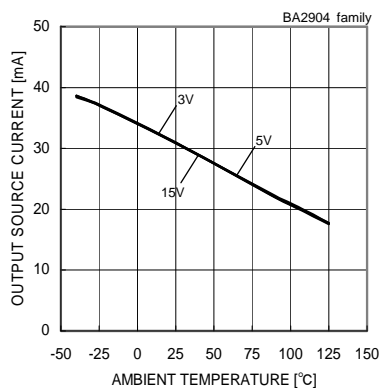


Fig. 55  
Output Source Current - Ambient Temperature  
( $V_{OUT}=0[V]$ )

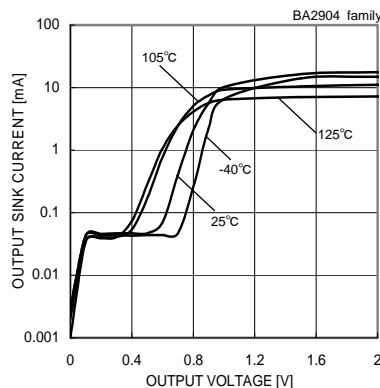


Fig. 56  
Output Sink Current - Output Voltage  
( $V_{CC}=5[V]$ )

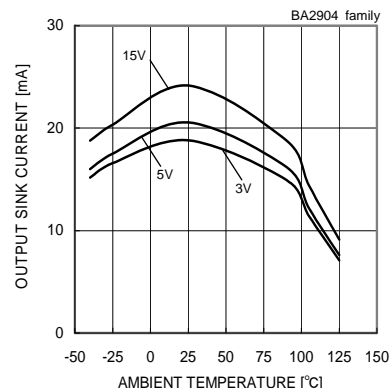


Fig. 57  
Output Sink Current - Ambient Temperature  
( $V_{OUT}=V_{CC}$ )

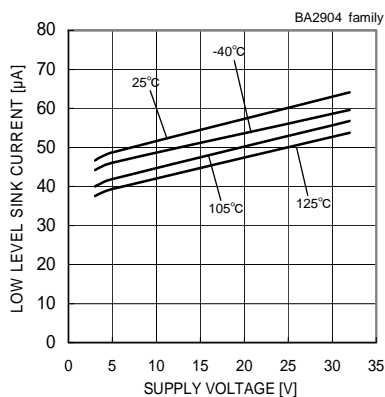


Fig. 58  
Low Level Sink Current - Supply Voltage  
( $V_{OUT}=0.2[V]$ )

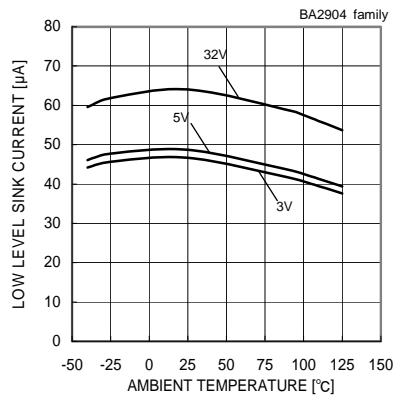


Fig. 59  
Low Level Sink Current - Ambient Temperature  
( $V_{OUT}=0.2[V]$ )

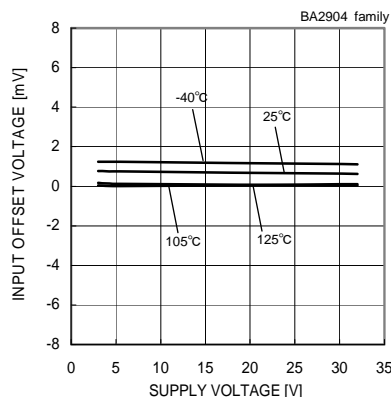


Fig. 60  
Input Offset Voltage - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

OBA2904 family

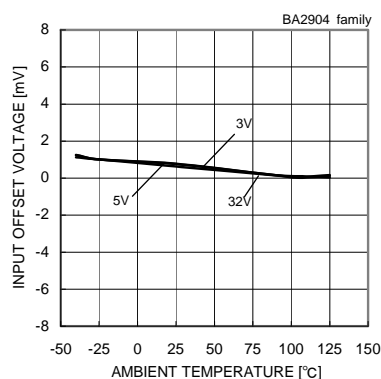


Fig. 61  
Input Offset Voltage - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

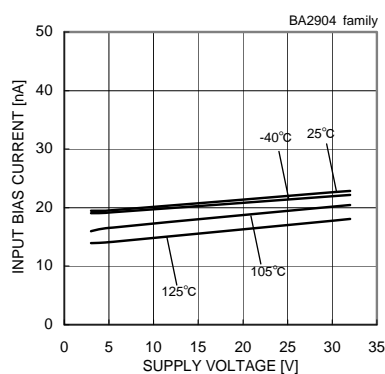


Fig. 62  
Input Bias Current - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

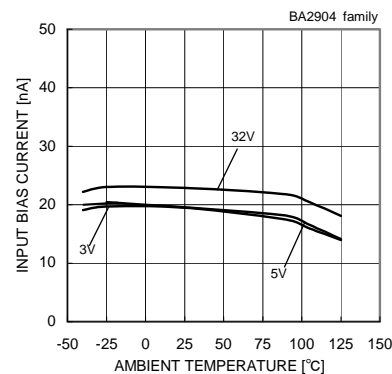


Fig. 63  
Input Bias Current - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

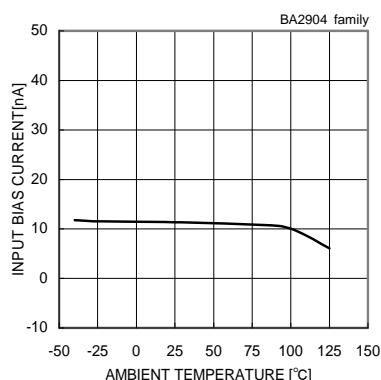


Fig. 64  
Input Bias Current - Ambient Temperature  
( $V_{CC}=30[V]$ ,  $V_{icm}=28[V]$ ,  $V_{OUT}=1.4[V]$ )

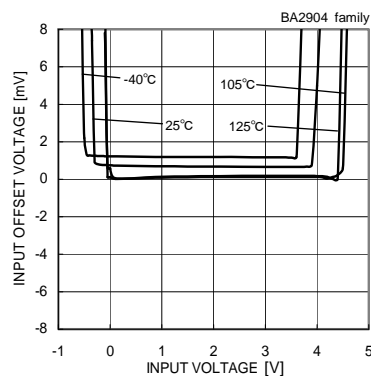


Fig. 65  
Input Offset Voltage - Common Mode Input Voltage  
( $V_{CC}=5[V]$ )

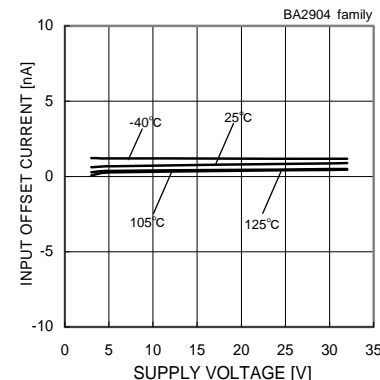


Fig. 66  
Input Offset Current - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

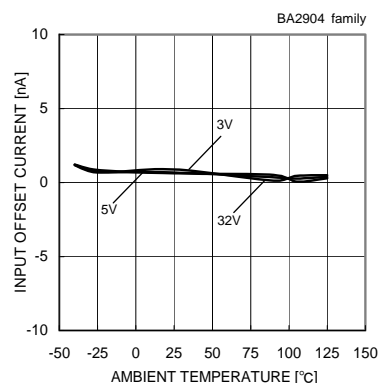


Fig. 67  
Input Offset Current - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

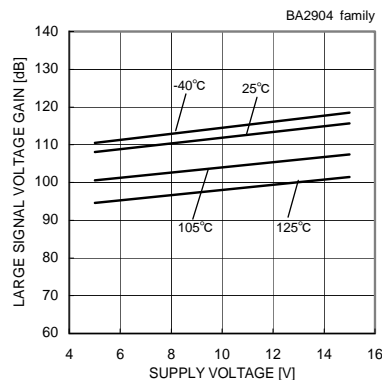


Fig. 68  
Large Signal Voltage Gain - Supply Voltage  
( $R_L=2[k\Omega]$ )

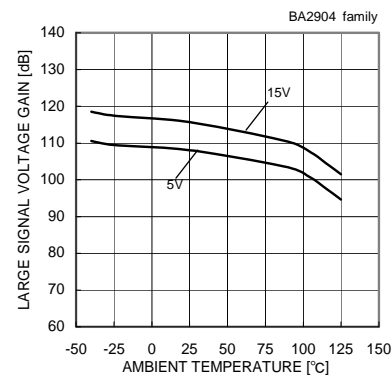


Fig. 69  
Large Signal Voltage Gain  
- Ambient Temperature  
( $R_L=2[k\Omega]$ )

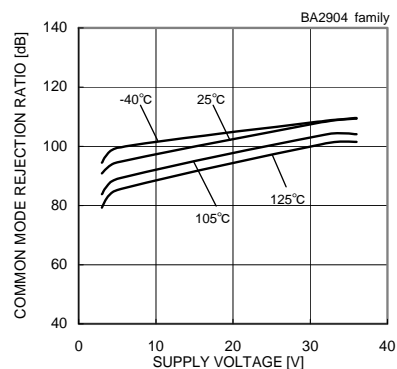


Fig. 70  
Common Mode Rejection Ratio  
- Supply Voltage

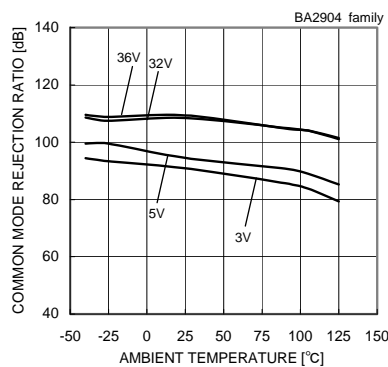


Fig. 71  
Common Mode Rejection Ratio  
- Ambient Temperature



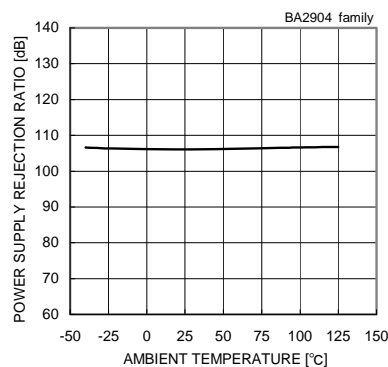


Fig. 72  
Power Supply Rejection Ratio  
- Ambient Temperature


OBA2902 family

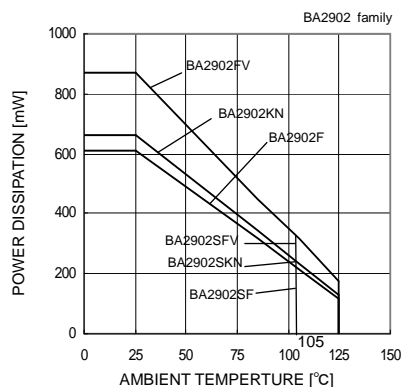


Derating Curve

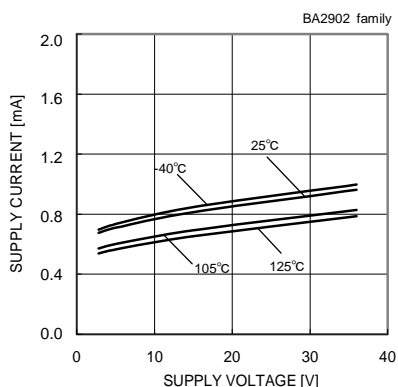


Supply Current - Supply Voltage

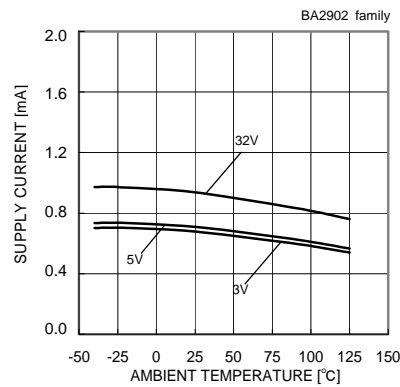


Supply Current - Ambient Temperature

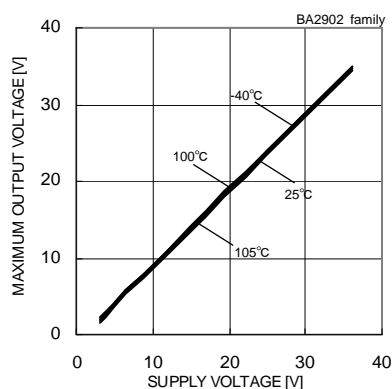


Maximum Output Voltage - Supply Voltage  
( $R_L=10[k\Omega]$ )

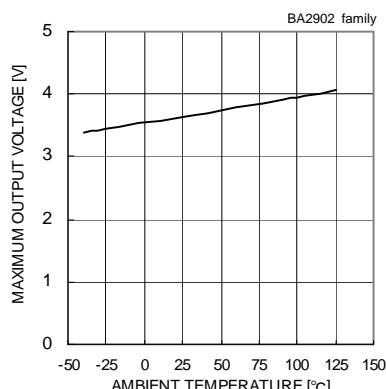


Maximum Output Voltage - Ambient Temperature  
( $V_{CC}=5[V]$ ,  $R_L=2[k\Omega]$ )

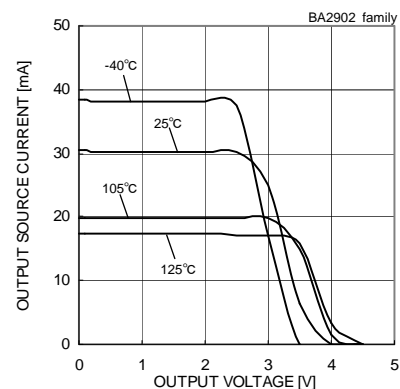


Output Source Current - Output Voltage  
( $V_{CC}=5[V]$ )

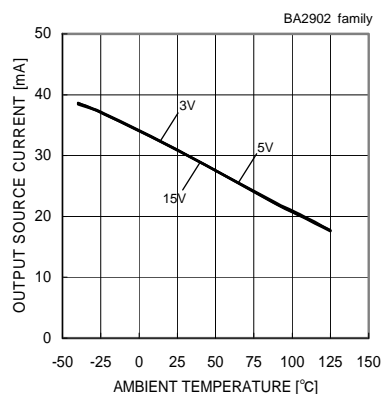


Output Source Current - Ambient Temperature  
( $V_{OUT}=0[V]$ )

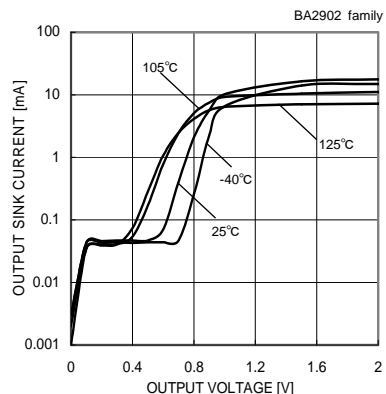


Output Sink Current - Output Voltage  
( $V_{CC}=5[V]$ )

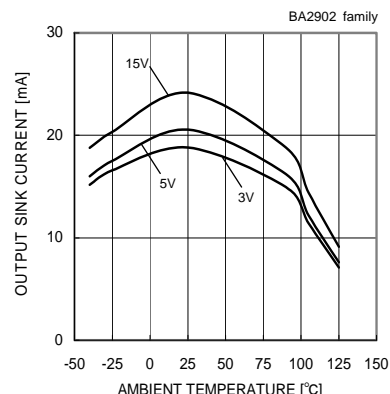


Output Sink Current - Ambient Temperature  
( $V_{OUT}=V_{CC}$ )

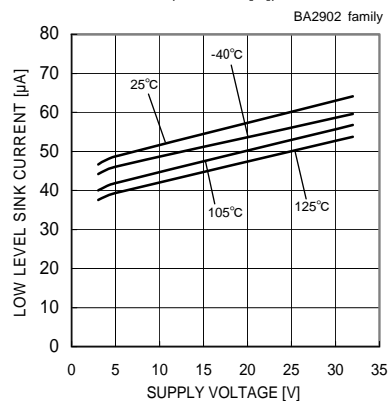

Low Level Sink Current - Supply Voltage  
( $V_{OUT}=0.2[V]$ )

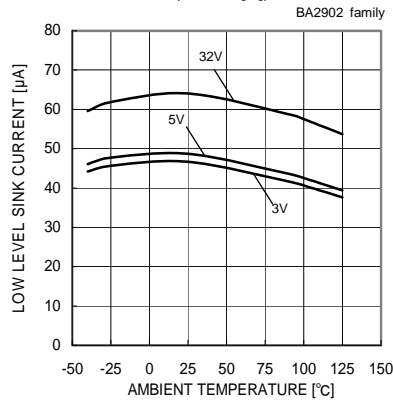

Low Level Sink Current - Ambient Temperature  
( $V_{OUT}=0.2[V]$ )

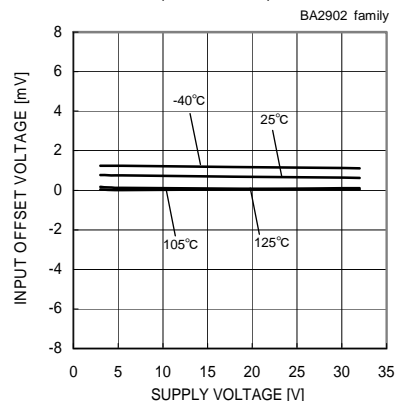

Input Offset Voltage - Supply Voltage  
( $V_{cm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

OBA2902 family

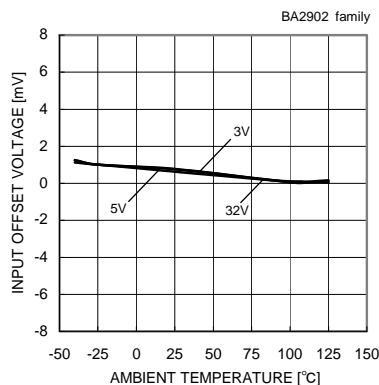


Fig. 85

Input Offset Voltage - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

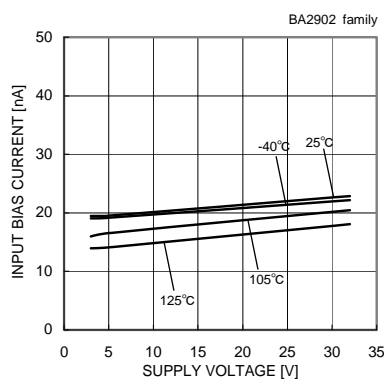


Fig. 86

Input Bias Current - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

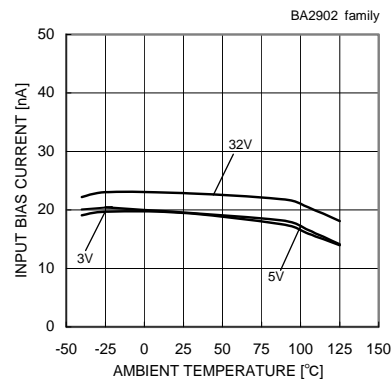


Fig. 87

Input Bias Current - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

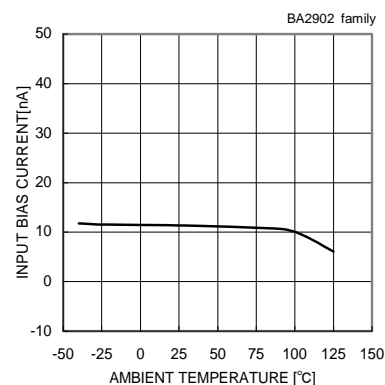


Fig. 88

Input Bias Current - Ambient Temperature  
( $V_{CC}=30[V]$ ,  $V_{icm}=28[V]$ ,  $V_{OUT}=1.4[V]$ )

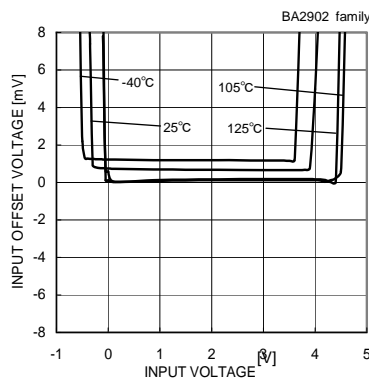


Fig. 89

Input Offset Voltage - Common Mode Input Voltage  
( $V_{CC}=5[V]$ )

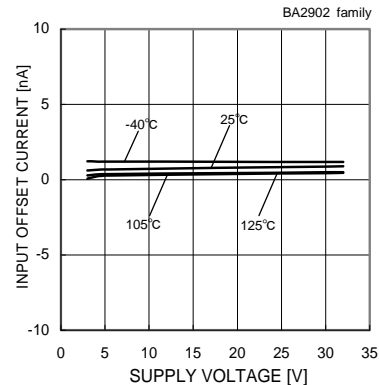


Fig. 90

Input Offset Voltage - Supply Voltage  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

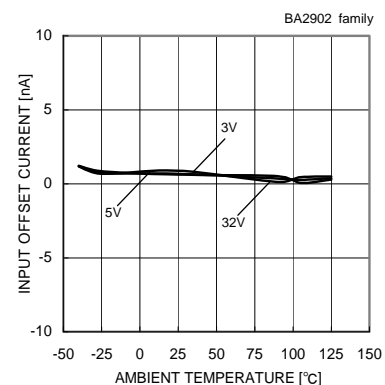


Fig. 91

Input Offset Current - Ambient Temperature  
( $V_{icm}=0[V]$ ,  $V_{OUT}=1.4[V]$ )

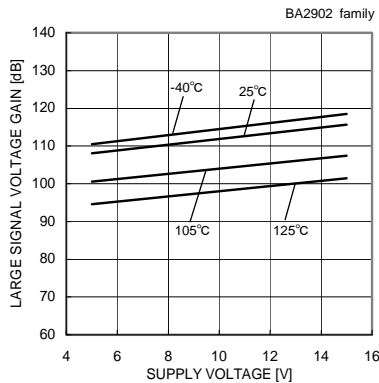


Fig. 92

Large Signal Voltage Gain - Supply Voltage  
( $R_L=2[k\Omega]$ )

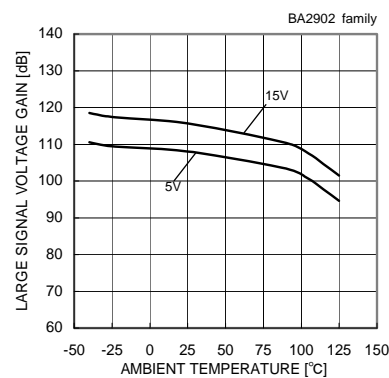


Fig. 93

Large Signal Voltage Gain - Ambient Temperature  
( $R_L=2[k\Omega]$ )

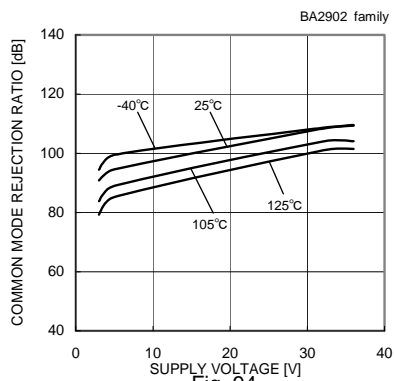


Fig. 94

Common Mode Rejection Ratio  
- Supply Voltage

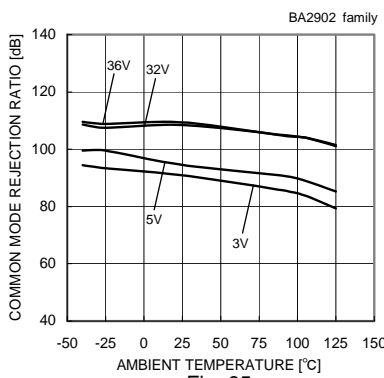


Fig. 95

Common Mode Rejection Ratio  
- Ambient Temperature

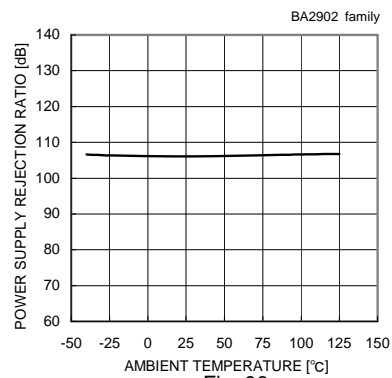


Fig. 96

Power Supply Rejection Ratio  
- Ambient Temperature

# OBA3404 family

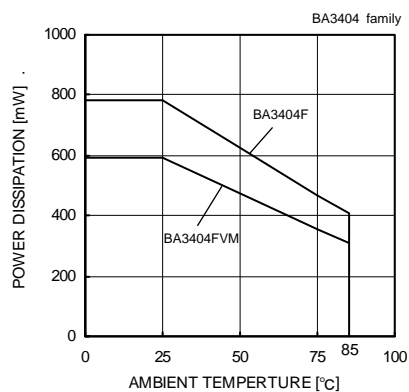


Fig. 97

Derating Curve

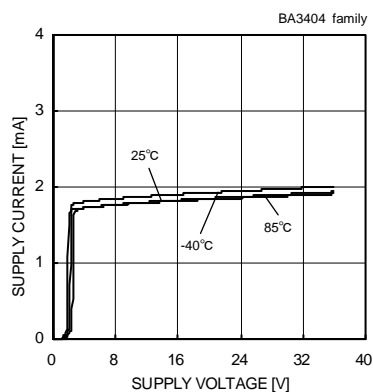


Fig. 98

Supply Current - Supply Voltage

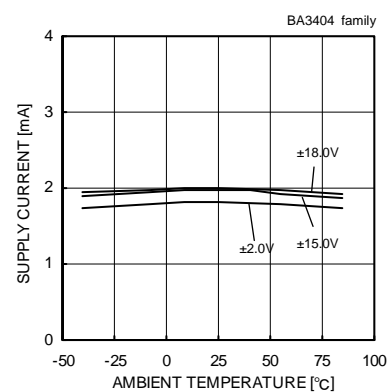


Fig. 99

Supply Current - Ambient Temperature

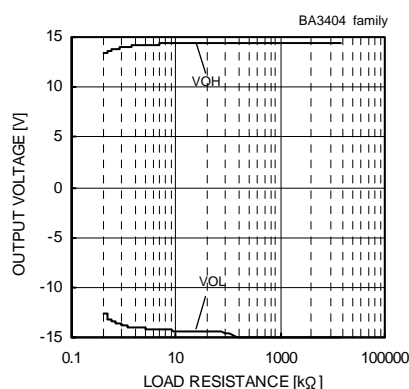


Fig. 100

Maximum Output Voltage - Load Resistance  
(VCC/VEE=+15[V]/-15[V], Ta=25[°C])

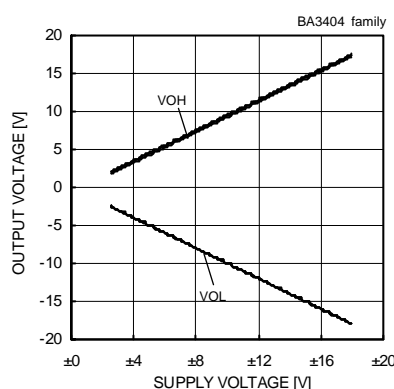


Fig. 101

Maximum Output Voltage - Supply Voltage

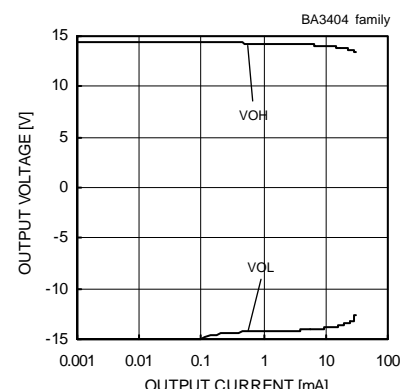


Fig. 102

Output Voltage - Output Current  
(VCC/VEE=+15[V]/-15[V], Ta=25[°C])

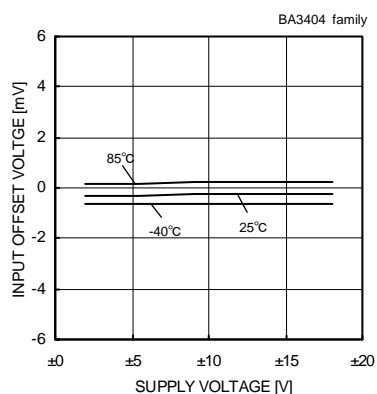


Fig. 103

Input Offset Voltage - Supply voltage  
(Vicm=0[V], VOUT=0[V])

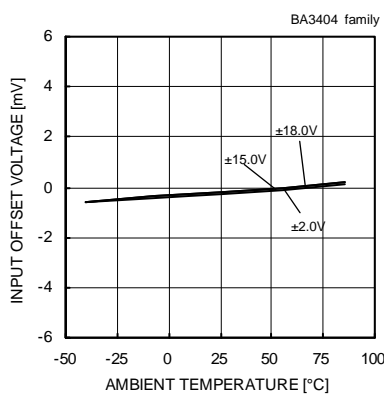


Fig. 104

Input Offset Voltage - Ambient Temperature  
(Vicm=0[V], VOUT=0[V])

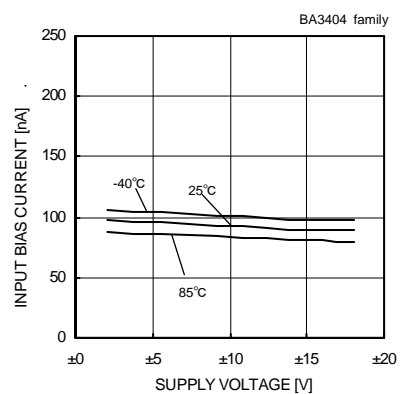


Fig. 105

Input Bias Current - Supply Voltage  
(Vicm=0[V], VOUT=0[V])

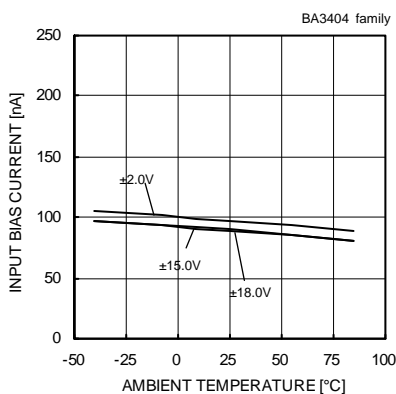


Fig. 106

Input Bias Current - Ambient Temperature  
(Vicm=0[V], VOUT=0[V])

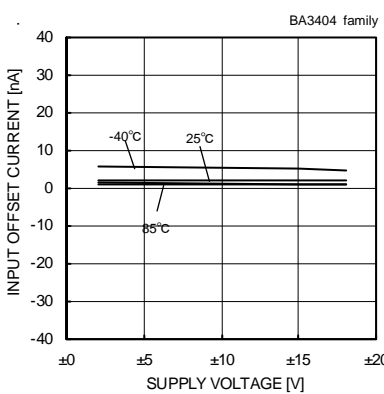


Fig. 107

Input Offset Current - Supply Voltage  
(Vicm=0[V], VOUT=0[V])

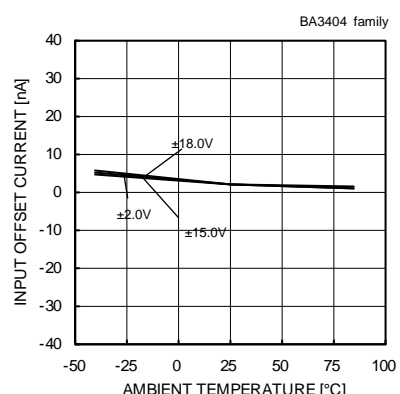


Fig. 108

Input Offset Current - Ambient Temperature  
(Vicm=0[V], VOUT=0[V])

OBA3404 family

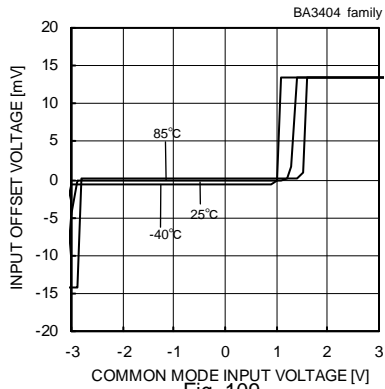


Fig. 109  
Input Offset Voltage  
- Common Mode Input Voltage  
(VCC/VEE=+2.5[V]/-2.5[V])

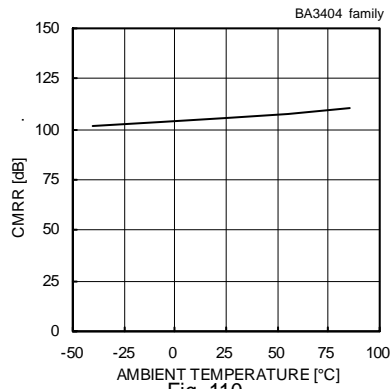


Fig. 110  
Common Mode Rejection Ratio  
- Ambient Temperature  
(VCC/VEE=+15[V]/-15[V])

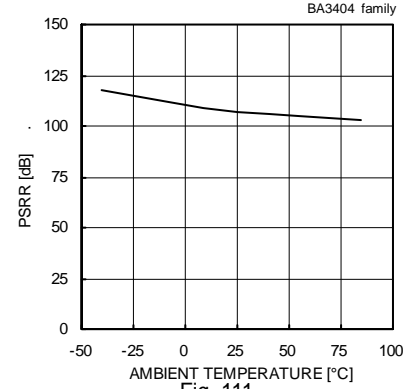


Fig. 111  
Power Supply Rejection Ratio  
- Ambient Temperature  
(VCC/VEE=+15[V]/-15[V])

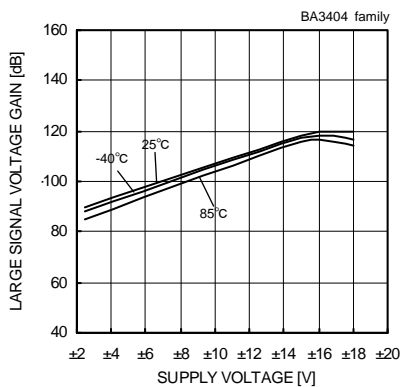


Fig. 112  
Large Signal Voltage Gain  
- Supply Voltage (RL=2[kΩ])

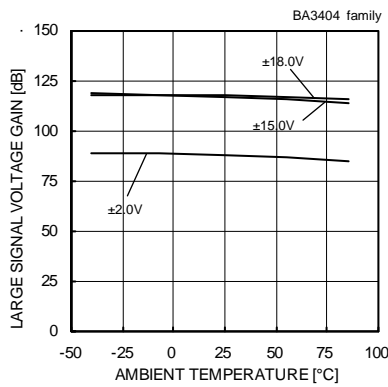


Fig. 113  
Large Signal Voltage Gain  
- Ambient Temperature (RL=2[kΩ])

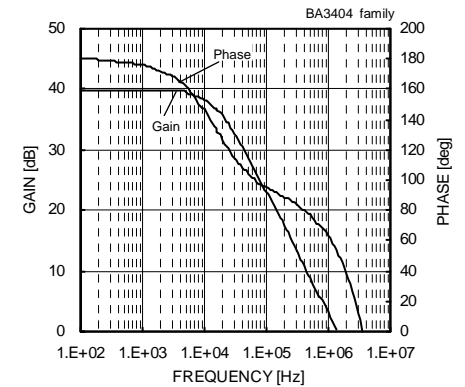


Fig. 114  
Voltage Gain - Frequency  
(VCC=±15V)

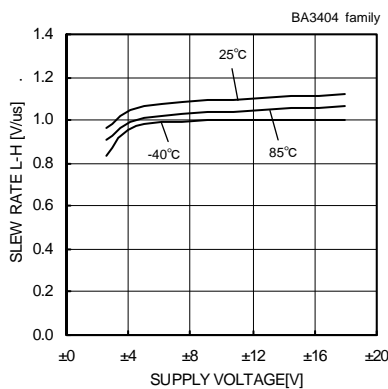


Fig. 115  
Slew Rate L-H - Supply Voltage

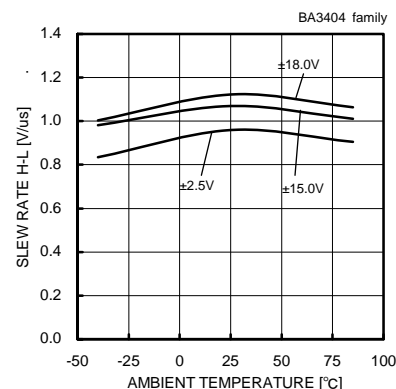


Fig. 116  
Slew Rate H-L - Ambient Temperature

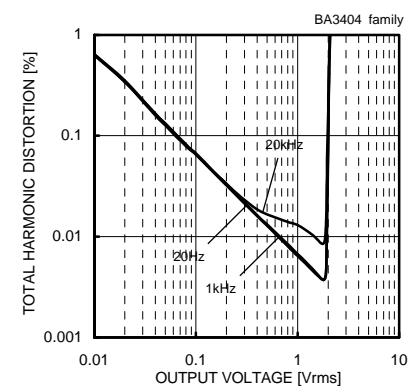


Fig. 117  
Total Harmonic Distortion - Output Voltage  
(VCC/VEE=+4[V]/-4[V], Av=0[dB],  
RL=2[kΩ], 80[kHz]-LPF, Ta=25[°C])

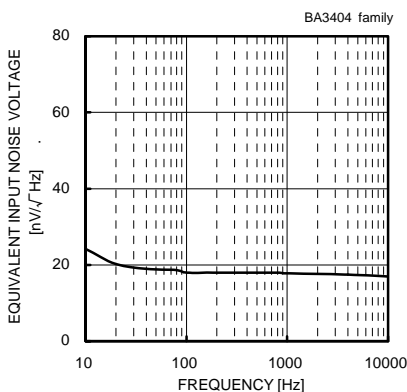


Fig. 118  
Equivalent Input Noise Voltage - Frequency  
(VCC/VEE=+15[V]/-15[V], Rs=100[Ω], Ta=25[°C])

# ●Circuit Diagram

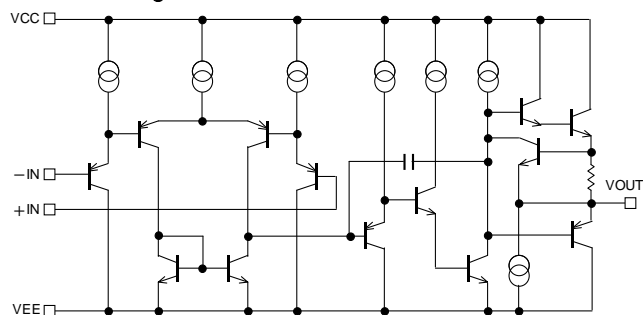


Fig. 119 Schematic Diagram  
(BA10358/BA10324A/BA2904S/  
BA2904/BA2902S/BA2902)

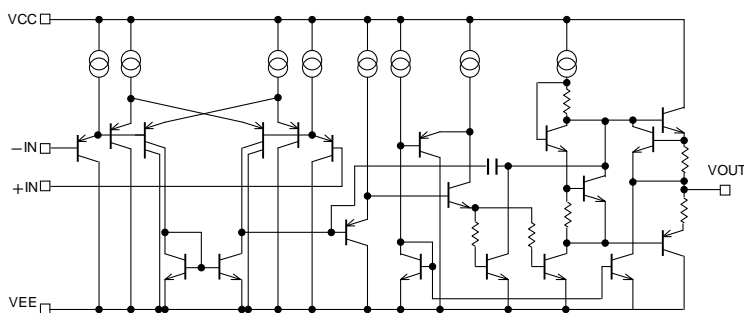


Fig. 120 Schematic Diagram  
(BA3404)

# ●Test circuit1 NULL method

VCC,VEE,EK,Vicm Unit:[V]

| Parameter   | VF   | S1  | S2  | S3  | BA10358 family<br>BA10324A family |     |       |      | BA2904 family<br>BA2902 family |     |       |      | BA3404 family |     |     |      | calculation |
|---|------|-----|-----|-----|-----------------------------------|-----|-------|------|--------------------------------|-----|-------|------|---------------|-----|-----|------|-------------|
|   |      |     |     |     | VCC                               | VEE | EK    | Vicm | VCC                            | VEE | EK    | Vicm | VCC           | VEE | EK  | Vicm |             |
| Input Offset Voltage  | VF1  | ON  | ON  | OFF | 5                                 | 0   | -1.4  | 0    | 5~30                           | 0   | -1.4  | 0    | 15            | -15 | 0   | 0    | 1           |
| Input Offset Current  | VF2  | OFF | OFF | OFF | 5                                 | 0   | -1.4  | 0    | 5                              | 0   | -1.4  | 0    | 15            | -15 | 0   | 0    | 2           |
| Input Bias Current  | VF3  | OFF | ON  | OFF | 5                                 | 0   | -1.4  | 0    | 5                              | 0   | -1.4  | 0    | 15            | -15 | 0   | 0    | 3           |
|   | VF4  | ON  | OFF |     |                                   |     |       |      |                                |     |       |      |               |     |     |      |             |
| Large Signal Voltage Gain                                     | VF5  | ON  | ON  | ON  | 15                                | 0   | -1.4  | 0    | 15                             | 0   | -1.4  | 0    | 15            | -15 | 10  | 0    | 4           |
|   | VF6  |     |     |     | 15                                | 0   | -11.4 | 0    | 15                             | 0   | -11.4 | 0    | 15            | -15 | -10 | 0    |             |
| Common-mode Rejection Ratio (Input common-mode Voltage Range) | VF7  | ON  | ON  | OFF | 5                                 | 0   | -1.4  | 0    | 5                              | 0   | -1.4  | 0    | 15            | -15 | 0   | -15  | 5           |
|   | VF8  |     |     |     | 5                                 | 0   | -1.4  | 3.5  | 5                              | 0   | -1.4  | 3.5  | 15            | -15 | 0   | 13   |             |
| Power Supply Rejection Ratio                                  | VF9  | ON  | ON  | OFF | 5                                 | 0   | -1.4  | 0    | 5                              | 0   | -1.4  | 0    | 2             | -2  | 0   | 0    | 6           |
|   | VF10 |     |     |     | 30                                | 0   | -1.4  | 0    | 30                             | 0   | -1.4  | 0    | 15            | -15 | 0   | 0    |             |

-Calculation-

1. Input Offset Voltage (Vio)

$$V_{io} = \frac{|VF1|}{1 + R_f / R_s} \quad [V]$$

2. Input Offset Current (Iio)

$$I_{io} = \frac{|VF2 - VF1|}{R_i \times (1 + R_f / R_s)} \quad [A]$$

3. Input Bias Current (Ib)

$$I_b = \frac{|VF4 - VF3|}{2 \times R_i \times (1 + R_f / R_s)} \quad [A]$$

4. Large Signal Voltage Gain (Av)

$$A_v = 20 \times \log \frac{\Delta E_K \times (1 + R_f / R_s)}{|VF5 - VF6|} \quad [dB]$$

5. Common-mode Rejection Ration (CMRR)

$$CMRR = 20 \times \log \frac{\Delta V_{icm} \times (1 + R_f / R_s)}{|VF8 - VF7|} \quad [dB]$$

6. Power supply rejection ratio (PSRR)

$$PSRR = 20 \times \log \frac{\Delta V_{cc} \times (1 + R_f / R_s)}{|VF10 - VF9|} \quad [dB]$$

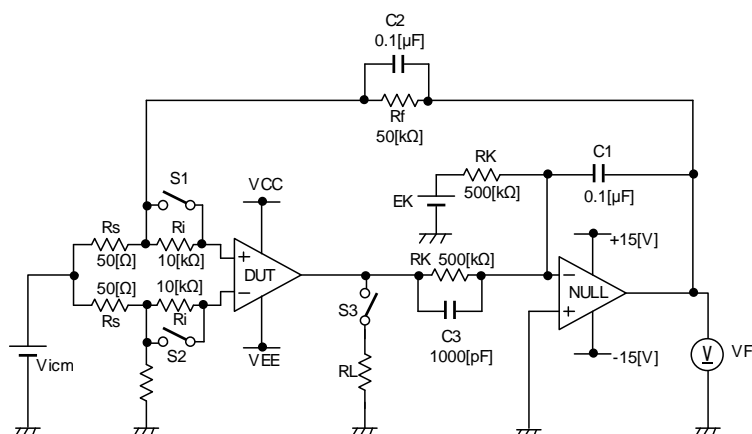


Fig. 121 Test circuit1 (one channel only)

●Test Circuit 2 Switch Condition

| SW No.                         | SW 1 | SW 2 | SW 3 | SW 4 | SW 5 | SW 6 | SW 7 | SW 8 | SW 9 | SW 10 | SW 11 | SW 12 | SW 13 | SW 14 |
|--------------------------------|------|------|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|
| Supply Current                 | OFF  | OFF  | OFF  | ON   | OFF  | ON   | OFF  | OFF  | OFF  | OFF   | OFF   | OFF   | OFF   | OFF   |
| High Level Output Voltage      | OFF  | OFF  | ON   | OFF  | OFF  | ON   | OFF  | OFF  | ON   | OFF   | OFF   | OFF   | ON    | OFF   |
| Low Level Output Voltage       | OFF  | OFF  | ON   | OFF  | OFF  | ON   | OFF  | OFF  | OFF  | OFF   | OFF   | OFF   | ON    | OFF   |
| Output Source Current          | OFF  | OFF  | ON   | OFF  | OFF  | ON   | OFF  | OFF  | OFF  | OFF   | OFF   | OFF   | OFF   | ON    |
| Output Sink Current            | OFF  | OFF  | ON   | OFF  | OFF  | ON   | OFF  | OFF  | OFF  | OFF   | OFF   | OFF   | OFF   | ON    |
| Slew Rate                      | OFF  | OFF  | OFF  | ON   | OFF  | OFF  | OFF  | ON   | ON   | ON    | OFF   | OFF   | OFF   | OFF   |
| Gain Bandwidth Product         | OFF  | ON   | OFF  | OFF  | ON   | ON   | OFF  | OFF  | ON   | ON    | OFF   | OFF   | OFF   | OFF   |
| Equivalent Input Noise Voltage | ON   | OFF  | OFF  | OFF  | ON   | ON   | OFF  | OFF  | OFF  | OFF   | ON    | OFF   | OFF   | OFF   |

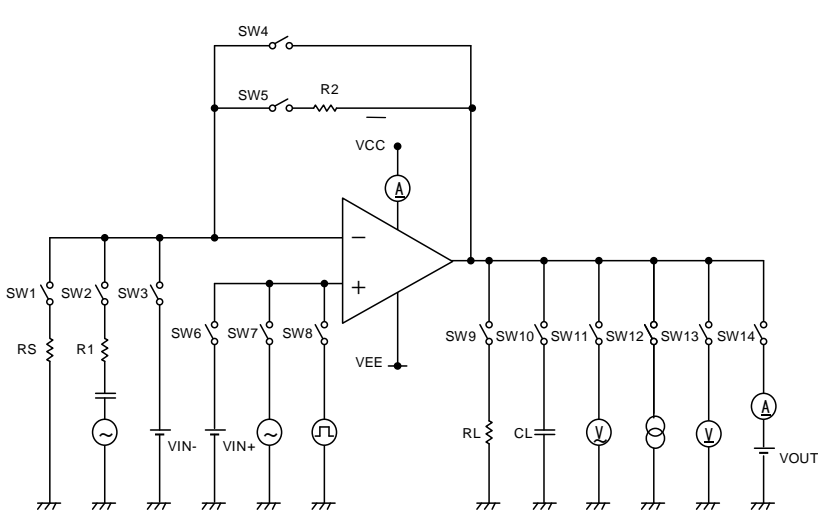


Fig.122 Test Circuit 2 (each Op-Amp)

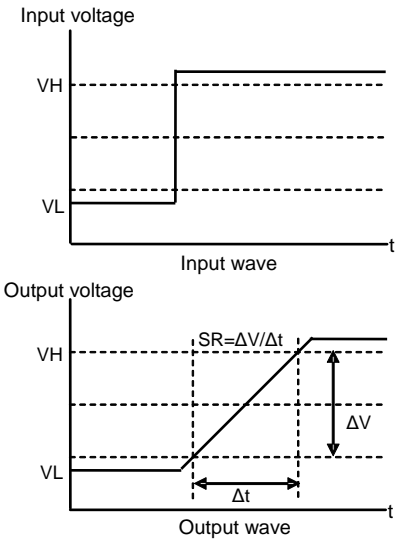


Fig. 123 Slew Rate Input Waveform

●Measurement Circuit 3 Amplifier To Amplifier Coupling


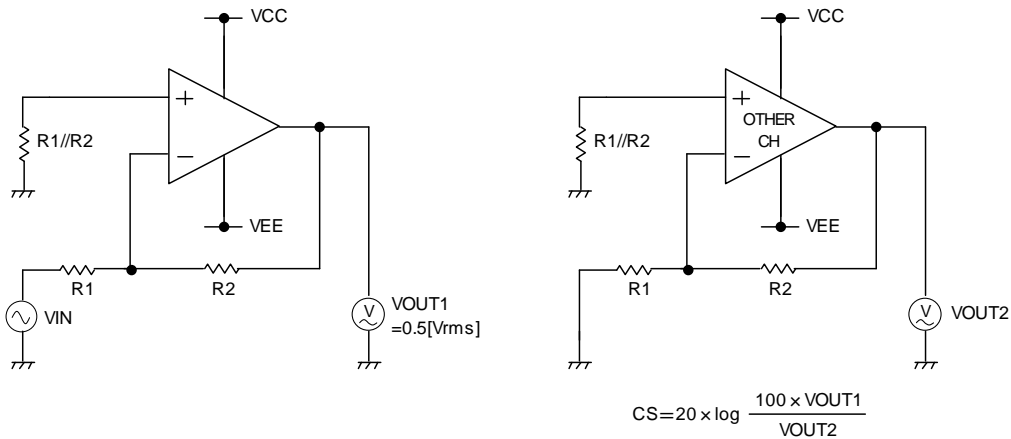


Fig. 124 Test Circuit 3

## ●Examples of circuit

### ○Voltage follower

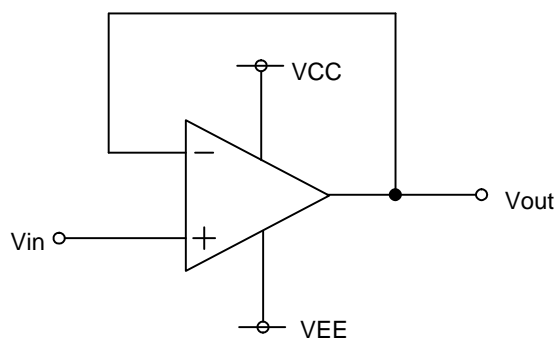


Voltage gain is 0 [dB].

This circuit controls output voltage ( $V_{out}$ ) equal input voltage ( $V_{in}$ ), and keeps  $V_{out}$  with stable because of high input impedance and low output impedance.

$V_{out}$  is shown next formula.

$$V_{out} = V_{in}$$

### ○Inverting amplifier

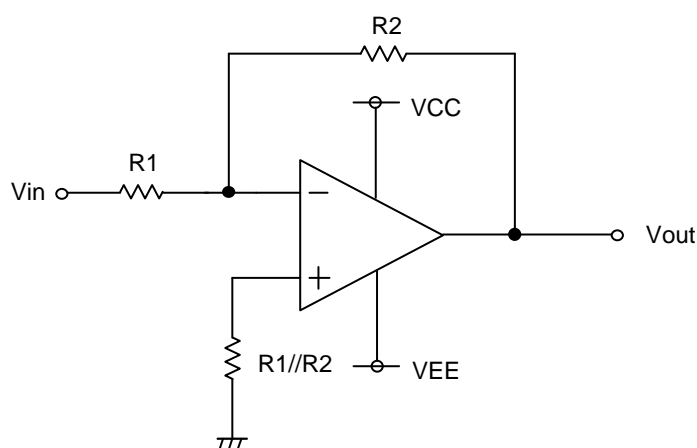


For inverting amplifier,  $V_{in}$  is amplified by voltage gain decided  $R1$  and  $R2$ , and phase reversed voltage is outputed.

$V_{out}$  is shown next formula.

$$V_{out} = -(R2/R1) \cdot V_{in}$$

Input impedance is  $R1$ .

### ○Non-inverting amplifier

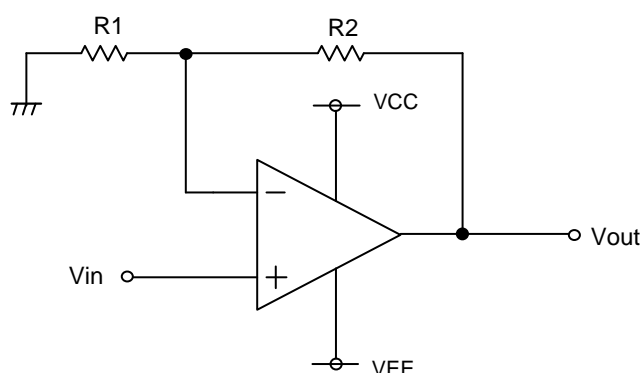

For non-inverting amplifier,  $V_{in}$  is amplified by voltage gain decided  $R1$  and  $R2$ , and phase is same with  $V_{in}$ .

$V_{out}$  is shown next formula.

$$V_{out} = (1 + R2/R1) \cdot V_{in}$$

This circuit realizes high input impedance because Input impedance is operational amplifier's input Impedance.

## ●Description of Electrical Characteristics

Described below are descriptions of the relevant electrical terms

Please note that item names, symbols and their meanings may differ from those on another manufacturer's documents.

### 1. Absolute maximum ratings

The absolute maximum ratings are values that should never be exceeded, since doing so may result in deterioration of electrical characteristics or damage to the part itself as well as peripheral components.

#### 1.1 Power supply voltage (VCC-VEE)

Expresses the maximum voltage that can be supplied between the positive and negative supply terminals without causing deterioration of the electrical characteristics or destruction of the internal circuitry.

#### 1.2 Differential input voltage (V<sub>id</sub>)

Indicates the maximum voltage that can be supplied between the non-inverting and inverting terminals without damaging the IC.

#### 1.3 Input common-mode voltage range (V<sub>icm</sub>)

Signifies the maximum voltage that can be supplied to non-inverting and inverting terminals without causing deterioration of the characteristics or damage to the IC itself. Normal operation is not guaranteed within the common-mode voltage range of the maximum ratings - use within the input common-mode voltage range of the electric characteristics instead.

#### 1.4 Operating and storage temperature ranges (T<sub>opr</sub>, T<sub>stg</sub>)

The operating temperature range indicates the temperature range within which the IC can operate. The higher the ambient temperature, the lower the power consumption of the IC. The storage temperature range denotes the range of temperatures the IC can be stored under without causing excessive deterioration of the electrical characteristics.

#### 1.5 Power dissipation (P<sub>d</sub>)

Indicates the power that can be consumed by a particular mounted board at ambient temperature (25°C). For packaged products, P<sub>d</sub> is determined by the maximum junction temperature and the thermal resistance.

### 2. Electrical characteristics

#### 2.1 Input offset voltage (V<sub>io</sub>)

Signifies the voltage difference between the non-inverting and inverting terminals. It can be thought of as the input voltage difference required for setting the output voltage to 0 V.

#### 2.2 Input offset voltage drift ( $\Delta V_{io}/\Delta T$ )

Denotes the ratio of the input offset voltage fluctuation to the ambient temperature fluctuation.

#### 2.3 Input offset current (I<sub>io</sub>)

Indicates the difference of input bias current between the non-inverting and inverting terminals.

#### 2.4 Input offset current drift ( $\Delta I_{io}/\Delta T$ )

Signifies the ratio of the input offset current fluctuation to the ambient temperature fluctuation.

#### 2.5 Input bias current (I<sub>b</sub>)

Denotes the current that flows into or out of the input terminal, it is defined by the average of the input bias current at the non-inverting terminal and the input bias current at the inverting terminal.

#### 2.6 Circuit current (I<sub>CC</sub>)

Indicates the current of the IC itself that flows under specified conditions and during no-load steady state.

#### 2.7 High level output voltage/low level output voltage (V<sub>OH</sub>/V<sub>OL</sub>)

Signifying the voltage range that can be output under specified load conditions, it is in general divided into high level output voltage and low level output voltage. High level output voltage indicates the upper limit of the output voltage, while low level output voltage the lower limit.

#### 2.8 Large signal voltage gain (A<sub>V</sub>)

The amplifying rate (gain) of the output voltage against the voltage difference between non-inverting and inverting terminals, it is (normally) the amplifying rate (gain) with respect to DC voltage.

$A_V = (\text{output voltage fluctuation}) / (\text{input offset fluctuation})$

#### 2.9 Input common-mode voltage range (V<sub>icm</sub>)

Indicates the input voltage range under which the IC operates normally.

- 2.10 Common-mode rejection ratio (CMRR)  
Signifies the ratio of fluctuation of the input offset voltage when the in-phase input voltage is changed (DC fluctuation).  
$$\text{CMRR} = (\text{change in input common-mode voltage}) / (\text{input offset fluctuation})$$
- 2.11 Power supply rejection ratio (PSRR)  
Denotes the ratio of fluctuation of the input offset voltage when supply voltage is changed (DC fluctuation).  
$$\text{SVR} = (\text{change in power supply voltage}) / (\text{input offset fluctuation})$$
- 2.12 Output source current/ output sink current (IOH/IOL)  
The maximum current that can be output under specific output conditions, it is divided into output source current and output sink current. The output source current indicates the current flowing out of the IC, and the output sink current the current flowing into the IC.
- 2.13 Channel separation (CS)  
Expresses the amount of fluctuation of the input offset voltage or output voltage with respect to the change in the output voltage of a driven channel.
- 2.14 Slew rate (SR)  
Indicates the time fluctuation ratio of the output voltage when an input step signal is supplied.
- 2.15 Gain bandwidth product (GBW)  
The product of the specified signal frequency and the gain of the op-amp at such frequency, it gives the approximate value of the frequency where the gain of the op-amp is 1 (maximum frequency, and unity gain frequency).

## Derating curves

Power dissipation (total loss) indicates the power that can be consumed by IC at  $T_a = 25^\circ\text{C}$  (normal temperature). IC is heated when it consumed power, and the temperature of IC chip becomes higher than ambient temperature. The temperature that can be accepted by IC chip depends on circuit configuration, manufacturing process, and consumable power is limited. Power dissipation is determined by the temperature allowed in IC chip (maximum junction temperature) and thermal resistance of package (heat dissipation capability). The maximum junction temperature is typically equal to the maximum value in the storage temperature range. Heat generated by consumed power of IC radiates from the mold resin or lead frame of the package. The parameter which indicates this heat dissipation capability (hardness of heat release) is called thermal resistance, represented by the symbol  $\theta_{ja} [^\circ\text{C}/\text{W}]$ . The temperature of IC inside the package can be estimated by this thermal resistance. Fig.125(a) shows the model of thermal resistance of the package. Thermal resistance  $\theta_{ja}$ , ambient temperature  $T_a$ , junction temperature  $T_j$ , and power dissipation  $P_d$  can be calculated by the equation below:

$$\theta_{ja} = (T_j - T_a) / P_d \quad [^\circ\text{C}/\text{W}] \quad \dots \dots \quad (1)$$

Derating curve in Fig.125(b) indicates power that can be consumed by IC with reference to ambient temperature. Power that can be consumed by IC begins to attenuate at certain ambient temperature. This gradient is determined by thermal resistance  $\theta_{ja}$ . Thermal resistance  $\theta_{ja}$  depends on chip size, power consumption, package, ambient temperature, package condition, wind velocity, etc even when the same of package is used.

Thermal reduction curve indicates a reference value measured at a specified condition. Fig.126(c)~(f) show a derating curve for an example of BA10358, BA10324A, BA2904S, BA2904, BA2902S, BA2902, BA3404.


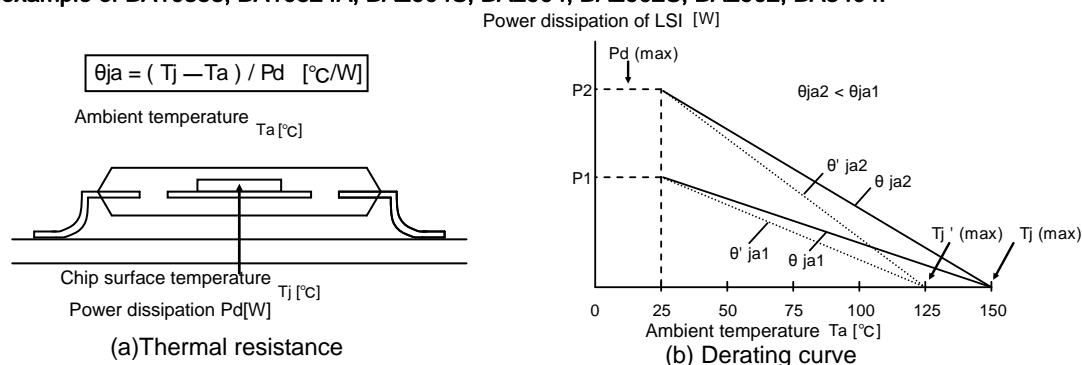


Fig. 125 Thermal resistance and derating

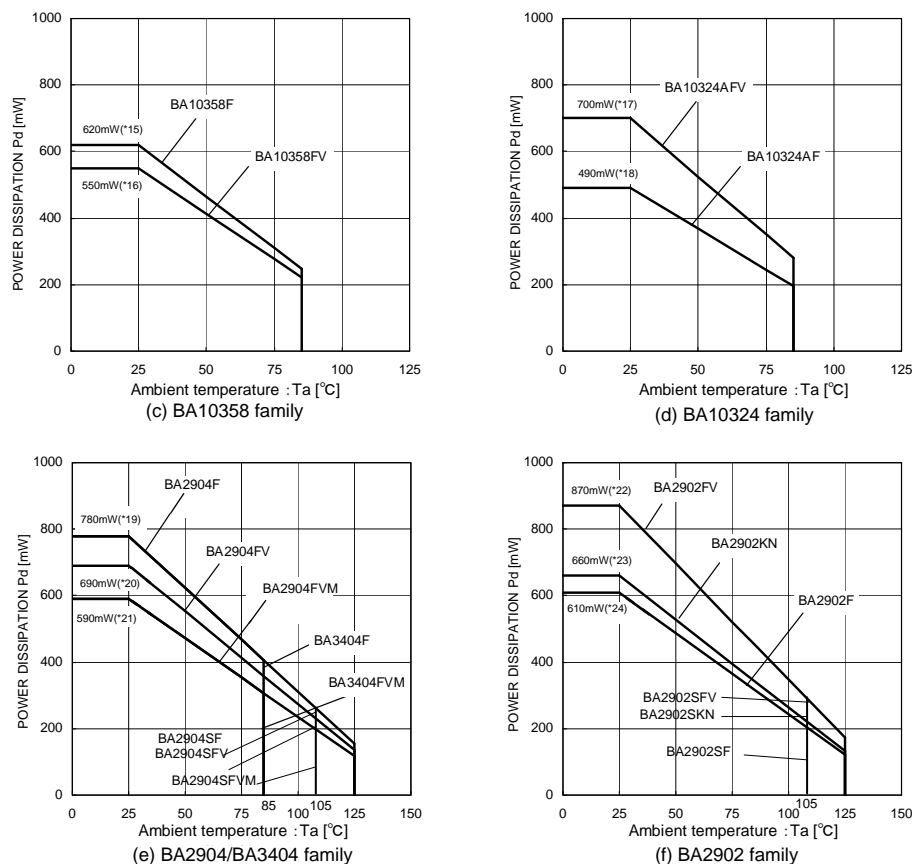

| (*15) | (*16) | (*17) | (*18) | (*19) | (*20) | (*21) | (*22) | (*23) | (*24) | Unit    |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| 6.2   | 5.5   | 7.0   | 4.9   | 6.2   | 5.5   | 4.8   | 7.0   | 5.3   | 4.9   | [mW/°C] |

When using the unit above  $T_a = 25^\circ\text{C}$ , subtract the value above per degree  $^\circ\text{C}$ .

Permissible dissipation is the value when FR4 glass epoxy board 70[mm] x 70[mm] x 1.6[mm] (copper foil area below 3[%]) is mounted.

Fig. 126 Derating curve

## ●Notes for use

### 1) Unused circuits

When there are unused circuits, it is recommended that they be connected as in Fig.127, setting the non-inverting input terminal to a potential within the in-phase input voltage range ( $V_{icm}$ ).

### 2) Input voltage

Applying  $VEE+32[V]$  (BA2904S / BA2904 /BA2902S / BA2902 family, BA2904HFVM-C) and  $VEE+36[V]$ (BA3404 family) to the input terminal is possible without causing deterioration of the electrical characteristics or destruction, irrespective of the supply voltage. However, this does not ensure normal circuit operation. Please note that the circuit operates normally only when the input voltage is within the common mode input voltage range of the electric characteristics.




Fig. 127 Example of processing unused circuit

### 3) Power supply (single / dual)

The op-amp operates when the voltage supplied is between VCC and VEE. Therefore, the single supply op-mp can be used as a dual supply op-amp as well.

### 4) Power dissipation ( $P_d$ )

Using the unit in excess of the rated power dissipation may cause deterioration in electrical characteristics due to the rise in chip temperature, including reduced current capability. Therefore, please take into consideration the power dissipation ( $P_d$ ) under actual operating conditions and apply a sufficient margin in thermal design. Refer to the thermal derating curves for more information.

### 5) Short-circuit between pins and erroneous mounting

Incorrect mounting may damage the IC. In addition, the presence of foreign substances between the outputs, the output and the power supply, or the output and GND may result in IC destruction.

### 6) Operation in a strong electromagnetic field

Operation in a strong electromagnetic field may cause malfunctions.

### 7) Radiation

This IC is not designed to withstand radiation.

### 8) IC handling

Applying mechanical stress to the IC by deflecting or bending the board may cause fluctuation of the electrical characteristics due to piezoelectric (piezo) effects.

### 9) IC operation

The output stage of the IC is configured using Class C push-pull circuits. Therefore, when the load resistor is connected to the middle potential of VCC and VEE, crossover distortion occurs at the changeover between discharging and charging of the output current. Connecting a resistor between the output terminal and GND, and increasing the bias current for Class A operation will suppress crossover distortion.

### 10) Board inspection

Connecting a capacitor to a pin with low impedance may stress the IC. Therefore, discharging the capacitor after every process is recommended. In addition, when attaching and detaching the jig during the inspection phase, ensure that the power is turned OFF before inspection and removal. Furthermore, please take measures against ESD in the assembly process as well as during transportation and storage.

### 11) Output capacitor

Discharge of the external output capacitor to VCC is possible via internal parasitic elements when VCC is shorted to VEE, causing damage to the internal circuitry due to thermal stress. Therefore, when using this IC in circuits where oscillation due to output capacitive load does not occur, such as in voltage comparators, use an output capacitor with a capacitance less than  $0.1\mu F$ .

●Ordering part number

|   |   |
|---|---|
| B | A |
|---|---|

Part No.

|   |   |   |   |
|---|---|---|---|
| 2 | 9 | 0 | 4 |
|---|---|---|---|

Part No.  
10358,10324A  
2904S,2904  
2902S, 2902  
3404

|   |   |
|---|---|
| F | V |
|---|---|


Package

F : SOP8  
SOP14  
FV : SSOP-B8  
SSOP-B14  
FVM : MSOP8  
KN : VQFN16

|   |   |
|---|---|
| E | 2 |
|---|---|


Packaging and forming specification  
E2: Embossed tape and reel  
(SOP8/SOP14/SSOP-B8/ SSOP-B14/VQFN16)  
TR: Embossed tape and reel  
(MSOP8)

SOP8

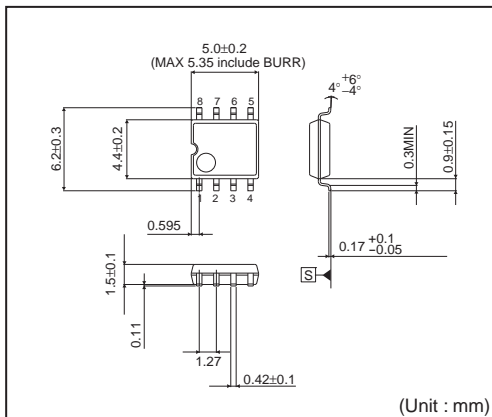


<Tape and Reel information>

|                   |   |
|-------------------|---|
| Tape              | Embossed carrier tape   |
| Quantity          | 2500pcs   |
| Direction of feed | E2<br>(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

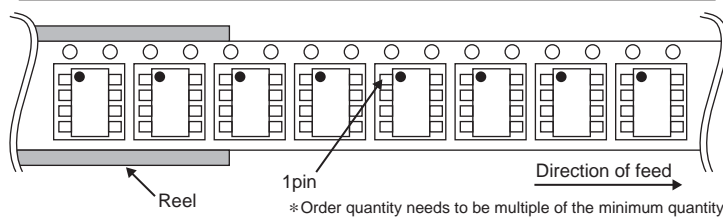


SOP14

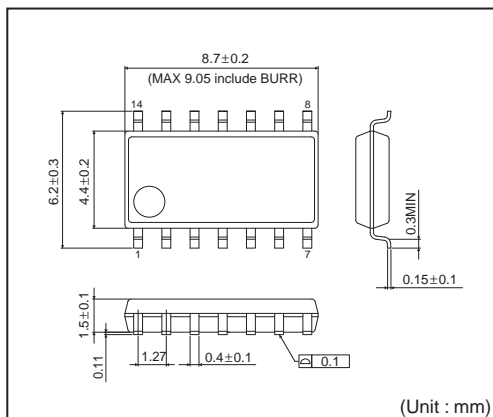


<Tape and Reel information>

|                   |   |
|-------------------|---|
| Tape              | Embossed carrier tape   |
| Quantity          | 2500pcs   |
| Direction of feed | E2<br>(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

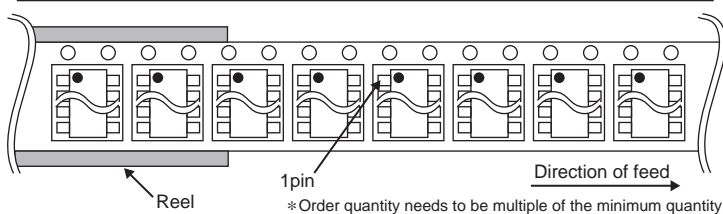


SSOP-B8

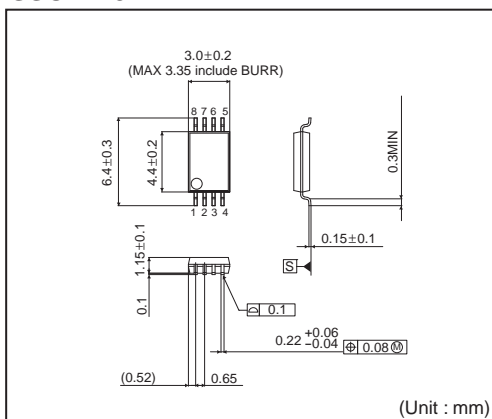


<Tape and Reel information>

|                   |   |
|-------------------|---|
| Tape              | Embossed carrier tape   |
| Quantity          | 2500pcs   |
| Direction of feed | E2<br>(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

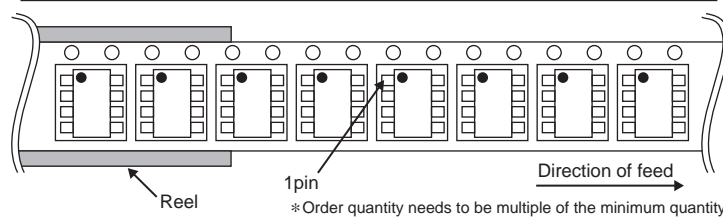


## SSOP-B14

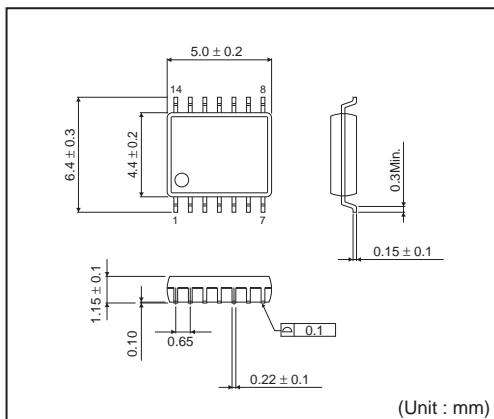


### <Tape and Reel information>

|                   |   |
|-------------------|---|
| Tape              | Embossed carrier tape   |
| Quantity          | 2500pcs   |
| Direction of feed | E2<br>(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

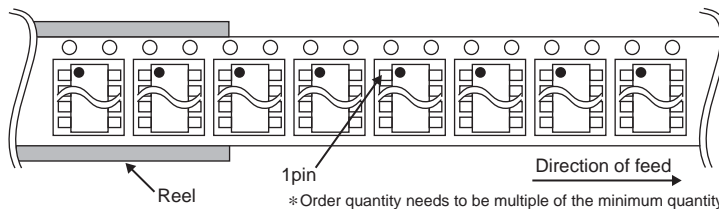


## MSOP8

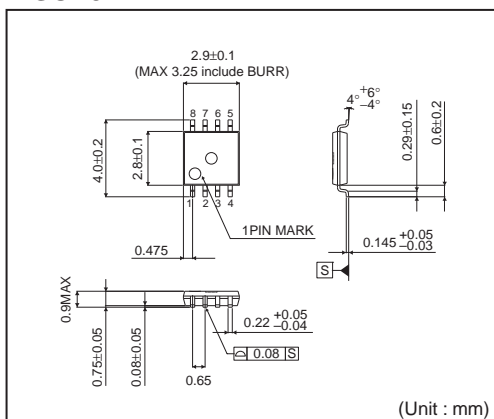


### <Tape and Reel information>

|                   |  |
|-------------------|--|
| Tape              | Embossed carrier tape  |
| Quantity          | 3000pcs  |
| Direction of feed | TR<br>(The direction is the 1pin of product is at the upper right when you hold reel on the left hand and you pull out the tape on the right hand) |

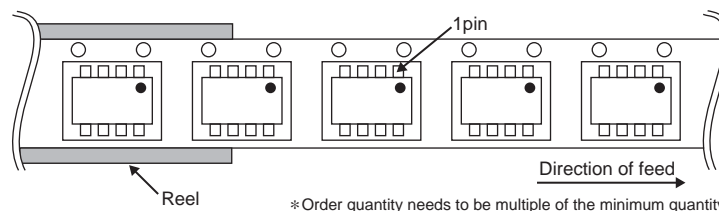


## VQFN16

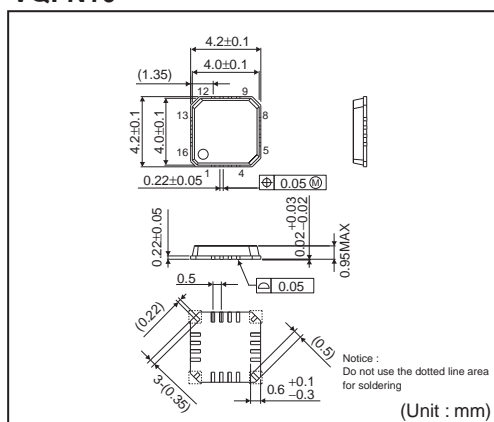

### <Tape and Reel information>

|                   |   |
|-------------------|---|
| Tape              | Embossed carrier tape (with dry pack)   |
| Quantity          | 2500pcs   |
| Direction of feed | E2<br>(The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand) |

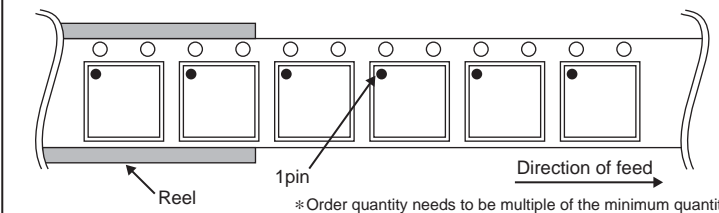

# Notice

## Precaution on using ROHM Products

- Our Products are designed and manufactured for application in ordinary electronic equipments (such as AV equipment, OA equipment, telecommunication equipment, home electronic appliances, amusement equipment, etc.). If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment <sup>(Note 1)</sup>, transport equipment, traffic equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

| JAPAN     | USA       | EU         | CHINA     |
|-----------|-----------|------------|-----------|
| CLASS III | CLASS III | CLASS II b | CLASS III |
| CLASS IV  |           | CLASS III  |           |

- ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
  - Installation of protection circuits or other protective devices to improve system safety
  - Installation of redundant circuits to reduce the impact of single or multiple circuit failure
- Our Products are designed and manufactured for use under standard conditions and not under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc. prior to use, must be necessary:
  - Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
  - Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
  - Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, and NO<sub>2</sub>
  - Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
  - Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
  - Sealing or coating our Products with resin or other coating materials
  - Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
  - Use of the Products in places subject to dew condensation
- The Products are not subject to radiation-proof design.
- Please verify and confirm characteristics of the final or mounted products in using the Products.
- In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- De-rate Power Dissipation (Pd) depending on Ambient temperature (Ta). When used in sealed area, confirm the actual ambient temperature.
- Confirm that operation temperature is within the specified range described in the product specification.
- ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

## Precaution for Mounting / Circuit board design

- When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- In principle, the reflow soldering method must be used; if flow soldering method is preferred, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

## Precautions Regarding Application Examples and External Circuits

1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

## Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of ionizer, friction prevention and temperature / humidity control).

## Precaution for Storage / Transportation

1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
  - [a] the Products are exposed to sea winds or corrosive gases, including Cl<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, and NO<sub>2</sub>
  - [b] the temperature or humidity exceeds those recommended by ROHM
  - [c] the Products are exposed to direct sunshine or condensation
  - [d] the Products are exposed to high Electrostatic
2. Even under ROHM recommended storage condition, solderability of products out of recommended storage time period may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is exceeding the recommended storage time period.
3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

## Precaution for Product Label

QR code printed on ROHM Products label is for ROHM's internal use only.

## Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

## Precaution for Foreign Exchange and Foreign Trade act

Since our Products might fall under controlled goods prescribed by the applicable foreign exchange and foreign trade act, please consult with ROHM representative in case of export.

## Precaution Regarding Intellectual Property Rights

1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data. ROHM shall not be in any way responsible or liable for infringement of any intellectual property rights or other damages arising from use of such information or data.:
2. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the information contained in this document.

## Other Precaution

1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
3. In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

**General Precaution**

1. Before you use our Products, you are requested to carefully read this document and fully understand its contents. ROHM shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any ROHM's Products against warning, caution or note contained in this document.
2. All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sales representative.
3. The information contained in this document is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate and/or error-free. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.