
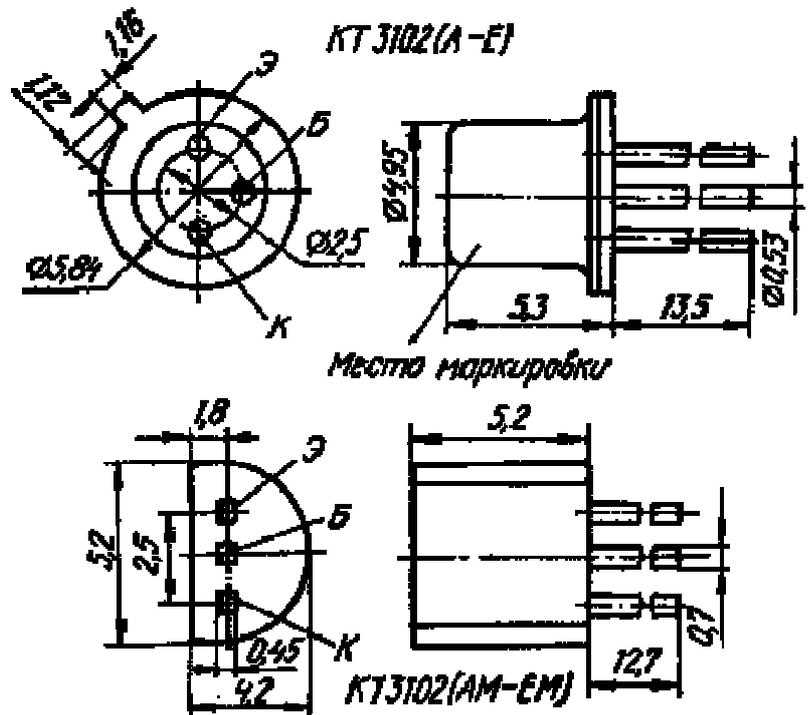
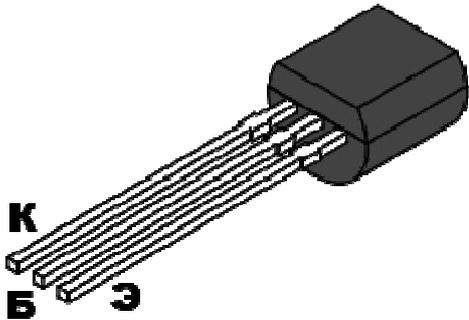


# КТ3102

КТ3102 (кремниевый транзистор, n-p-n)



Прибор	Предельные параметры									Параметры при T = 25°C										
	при T = 25°C									$h_{21э}$ ( $h_{21э}$ )	$U_{КБ}$ ( $U_{КЭ}$ ), В	$I_{э}$ ( $I_{К}$ ), МА	$U_{КЭ}$ $U_{наэ}$ , В	$I_{КБ0}$ , ( $I_{КЭ0}$ ), МА	$f_{гр}$ ( $f_{h21}$ ), МГц	$K_{ш}$ , ДБ	$C_{К}$ , пФ	$C_{э}$ , пФ	$t_{рас}$ , мкс	$R_{Т п-с}$ ( $R_{Т п-к}$ ), °C/Вт
	$I_{К}$ , max МА	$I_{К и.}$ max МА	$U_{КЭР}$ max ( $U_{КЭ0}$ max), В	$U_{КБ0}$ max, В	$U_{ЭБ0}$ max, В	$P_{К}$ max, ( $P_{max}$ ), мВт	$T$ , °C	$T_{п}$ max, °C	$T_{max}$ , °C											
КТ3102 А	100	200	(50)	50	5	(250)	25	125	85	100...250	5	2		0,05	10	6				400
КТ3102 Б	100	200	(50)	50	5	(250)	25	125	85	200...500	5	2		0,05	10	6				400
КТ3102 В	100	200	(30)	30	5	(250)	25	125	85	200...500	5	2		0,015	10	6				400
КТ3102 Г	100	200	20	20	5	(250)	25	125	85	400...1000	5	2		0,015	10	6				400
КТ3102 Д	100	200	(30)	30	5	(250)	25	125	85	200...500	5	2		0,015	4	6				400
КТ3102 Е	100	200	(50)	50	5	(250)	25	125	85	400...1000	5	2		0,015	4	6				400