


Leaded Common Mode Chokes – BCB Series

BCB Series


High Speed Data Line Filters

BCB0603RI-4R4-N

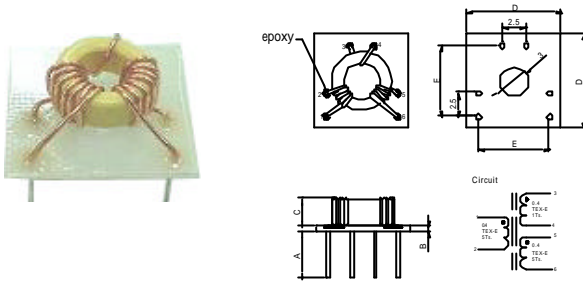


Dim (mm)	A	B	C	D	E
	5.0 \pm 1.0	0.5 \pm 0.05	6.0 $^{+0}$	10 \pm 0.5	7.5 \pm 0.5
Spec	L(1-2)(μ H)		L(3-4)(μ H)	L(5-6)(μ H)	
	3.54~5.53		0.141~0.52	3.6~6.53	

BCB1104RI-330-N

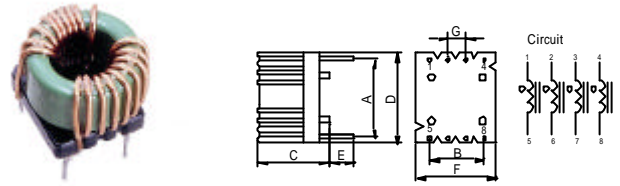


Dim (mm)	A	B	C	D	E	F	G
	10.8 \pm 0.5	7.62 \pm 0.5	8.89 $^{+0}$	12.45 \pm 0.5	3.5 \pm 0.5	10.92 \pm 0.5	2.5 \pm 0.15
Spec	L(μ H) @100KHz		LK(μ H) @1KHz	RDC ()	Interwinding Capacitance (p F)		
	25~50		1 $^{+0}$	0.07 $^{+0}$	30 $^{+0}$		

BCB1306RI-221-N

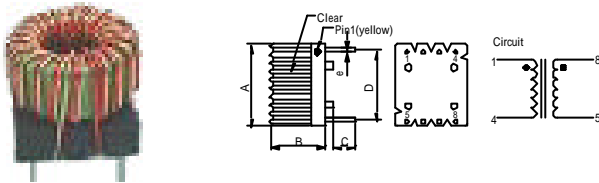

Dim (mm)	A	B	C	D	E
	16.0 $^{+0}$	12.7 $^{+0}$	3.48 \pm 0.5	10.8 \pm 0.5	0.65
Spec	L(μ H) @ 1KHz 1V		RDC (m)		
	220 \pm 30%		25 $^{+0}$		

BCB1306RI-221-N

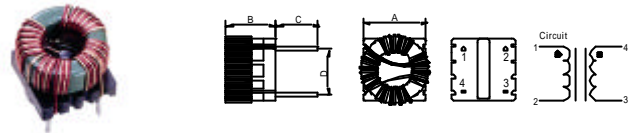

Dim (mm)	A	B	C	D
	15 $^{+0}$	12 $^{+0}$	3.5 \pm 1	7.8 \pm 0.2
Spec	L (mH)	RDC ()	Hi-Pot (V)(AC&DC)	
	1.5 $^{+0}$	0.11	650	