




DFR0.5A THRU DFR0.5M

SUFACE MOUNT FAST RECOVERY RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current -0.5Ampere

SOD-123FL

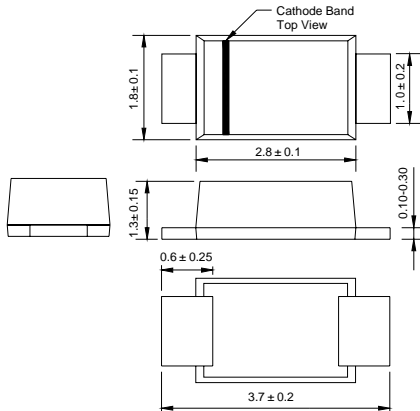

Dimensions in millimeters

FEATURES

- ◆ Glass passivated device
- ◆ Ideal for surface mouted applications
- ◆ Low reverse leakage
- ◆ Metallurgically bonded construction
- ◆ High temperature soldering guaranteed:
250°C/10 seconds,0.375"(9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

Case : JEDEC SOD-123FL molded plastic body over passivated chip

Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity : Color band denotes cathode end

Mounting Position : Any

Weight :0.0007 ounce, 0.02 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	DFR0.5A F05A	DFR0.5B F05B	DFR0.5D F05D	DFR0.5G F05G	DFR0.5J F05J	DFR0.5K F05K	DFR0.5M F05M	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V _{bc}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at TA=65°C (NOTE 1)	I _(AV)	0.5							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) TL=25°C	I _{FSM}	15.0							Amps
Maximum instantaneous forward voltage at 0.5A	V _F	1.3							Volts
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=125°C	I _R	5.0 50.0							μA
Maximum reverse recovery time (NOTE 2)	trr	150				250	500		ns
Typical junction capacitance (NOTE 3)	C _J	15							pF
Operating junction and storage temperature range	T _J ,T _{STG}	-50 to +150							°C

Note: 1.Averaged over any 20ms period.
2.Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.
3.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

MDD ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES DFR0.5A THRU DFR0.5M

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

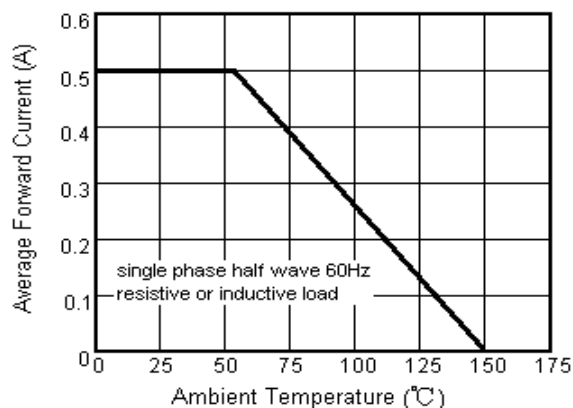


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

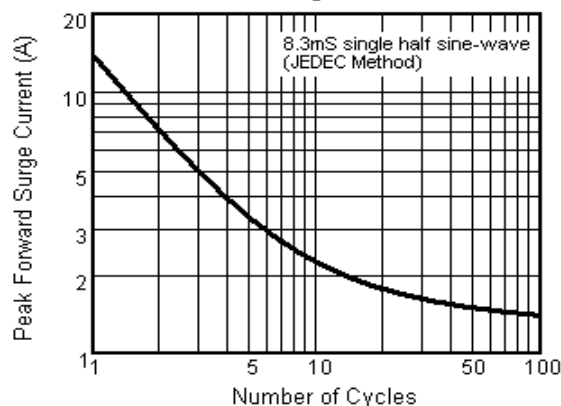


Fig.3 Typical Instantaneous Forward Characteristics

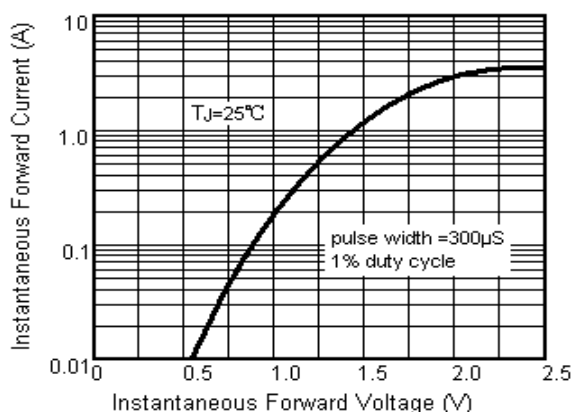


Fig.4 Typical Reverse Characteristics

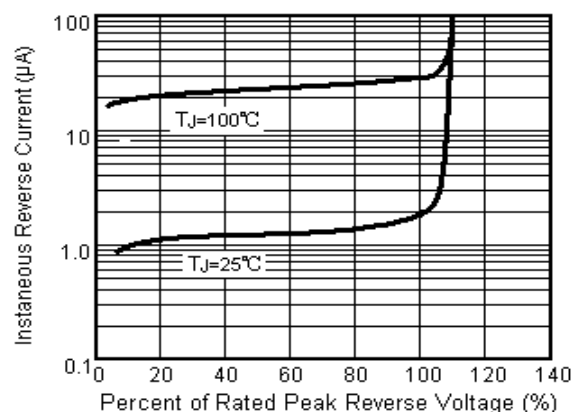


Fig.5 Typical Junction Capacitance

